K-STRONG®
UNRIVALED SAFETY.

KS GROUP

2025 CATALOG



Featuring:

EnduroX™
FULL BODY HARNESS

BRUTE™ BACKER™ LE
WE'VE GOT YOUR BACK.

WELCOME TO UNRIVALED SAFETY

With the support of over 4500 employees worldwide and nearly 50 acres of manufacturing production under roof, KStrong is best positioned to help your company protect its most valuable assets, its employees. In addition to meeting all applicable OSHA fall protection codes in the USA, KStrong is one of the few elite manufacturers that provides the highest certifications to the ANSI fall protection standards, Level 3!

In our continued growth as a full-service provider of fall protection, we have added several new products including K-Rail™ guardrails and a premium harness range, EndurX™.

As one of the world's largest full-service providers of fall protection, we can help your company tackle and solve even the most difficult fall hazards, those where traditional fall protection solutions come up short. KStrong Services Group (KSG) offers Engineering, Training and Consulting services to help your company comply with all OSHA fall hazard requirements.

We look forward in 2025 and beyond to keeping your employees safer while working at elevation and in confined spaces!

Sincerely,

John Kemp
President KStrong USA/Canada



TABLE OF CONTENTS

1. Self-Retracting Devices (SRD) 4
    - Micron™ Series 4
    - Micron™ Arc Flash Series 6
    - BRUTE™ Series 8
        - Cable 8
        - BRUTE-AL™ Aluminum 9
        - Web 10
        - BRUTE™ LE Leading Edge 12
        - BRUTE-AL™ Aluminum LE Leading Edge 13
        - Backer™ LE Leading Edge 14
        - Backer™ LE Leading Edge Web 16
        - Sealed Block 18
2. Body Wear - Full Body Harness Kapture™ Series 20
    - EndurX™ 20
    - Epic 26
    - Element 27
        - Arc Flash 27
        - Welding Flame Retardant 29
        - Oil & Gas Derrick 30
    - Elite 32
    - Essential 36
    - Harness Accessories 39
    - Harness Feature Chart 41
3. Shock Absorbing Lanyards (SAL) 45
    - Internal Design 45
    - Elasticated Design 46
    - Clear Pack Design 47
    - Specialty 48
    - LE Rated 49
    - Arc Flash 50
4. Work Positioning Lanyards (WPL) 51
5. Fall Protection Kits 52
6. Anchorages 54
7. Roofer Kits, Anchors, Grabs & Vertical Lifelines (VLL) 57
8. Horizontal Lifelines (HLL) 60
9. Confined Space/Rescue Retrieval 64
10. EVAC-R+ Rescue System 70
11. Connectors 71
12. Ladder Climbing System 72
13. Engineered Horizontal Lifeline Systems 74
14. K-Rail™ Guardrail 88
15. Tool Lanyard Drop Prevention 90
16. Bags 94
17. Quick Index 95
18. Compass™ Mobile Asset Management 96

SELF-RETRACTING LIFELINES

KStrong is proud to offer a full range of ANSI rated Class 1 and Class 2 self-retracting devices to help workers meet nearly every user requirement covering a wide variety of applications. KStrong's Micron™ and BRUTE™ brands have become the preferred choice in construction, utilities maintenance, and general industries as they provide durable performance and reliability, supported with industry-preferred Level 3 ANSI independent 3rd-party testing documentation. KStrong continues to expand its self-retracting device offering to the market in 2024 with the introduction of Arc-Flash rated Micron™ units and additional lifeline lengths within the BRUTE™ product brand.

MICRON™ SRL SERIES

OSHA RATED 420 LBS. MICRON



UFC401101 Carabiner included with every Micron™ single SRL.

Micron™ Class 1 SRL-P Series



SELF-RETRACTING LIFELINES













	Model	Length	Description	Class
A	UFS350002	6 ft.	Steel Snap Hook; comes with locking carabiner UFC401101	1
B	UFS350002D	6 ft.	Twin Model - Steel Snap Hook; comes with UFC409151	1
C	UFS351102	6 ft.	Aluminum Carabiner; comes with locking carabiner UFC401101	1
D	UFS351102D	6 ft.	Twin Model - Aluminum Carabiner; comes with UFC409151	1
E	UFS354002	6 ft.	Steel Rebar Hook; comes with locking carabiner UFC401101	1
F	UFS354002D	6 ft.	Twin Model - Steel Rebar Hook; comes with UFC409151	1
G	UFS356002	6 ft.	Aluminum Rebar Hook w/ Steel ANSI Gate; comes with locking carabiner UFC401101	1
H	UFS356002D	6 ft.	Twin Model - Aluminum Rebar Hook w/ Steel ANSI Gate; comes with UFC409151	1
J	UFS359002	9 ft.	Tie-back Hook; comes with locking carabiner UFC401101	1
K	UFS359002D	9 ft.	Twin Model - Tie-back Hook; comes with UFC409151	1
L	UFC409151	Twin/Single Connector (Steel Pin)		

MICRON™ SRL SERIES

ARC FLASH RATED

ASTM F887-20

Micron™ Arc Flash Class 1 SRL-P Series





UFC401101
Carabiner included with every Micron™ single SRL.

OSHA RATED
420 LBS.
MICRON

SELF-RETRACTING LIFELINES










	Model	Length	Description	Class
A	**UFS390006**	6 ft.	Arc Flash Rated, Steel Snap Hook; comes with locking carabiner UFC401101	1
B	**UFS390006D**	6 ft.	Arc Flash Rated Twin Model - Steel Snap Hook; comes with UFC409151	1
C	**UFS394006**	6 ft.	Arc Flash Rated, Steel Rebar Hook; comes with locking carabiner UFC401101	1
D	**UFS394006D**	6 ft.	Arc Flash Rated Twin Model - Steel Rebar Hook; comes with UFC409151	1
E	**UFS396006**	6 ft.	Arc Flash Rated, Aluminum Rebar Hook w/ Steel ANSI Gate; comes with locking carabiner UFC401101	1
F	**UFS396006D**	6 ft.	Arc Flash Rated Twin Model - Aluminum Rebar Hook w/ Steel ANSI Gate; comes with UFC409151	1
G	**UFC409151**	Twin/Single Connector (Steel Pin)		

BRUTE™ Class 1 SRL Series - Wire Cable | Overhead

	Model	Length	Cable Type	Attachment End	Installation Carabiner	Class
A	UFS330008(SS)	8 ft.	Stainless Steel	Snap Hook	UFC401101	1
B	UFS310010	10 ft.	Galvanized Steel	Snap Hook	UFC401101	1
C	UFS310020	20 ft.	Galvanized Steel	Snap Hook	UFC401101	1
C	UFS310020(SS)	18 ft.	Stainless Steel	Snap Hook	UFC401101	1
D	UFS310030	30 ft.	Galvanized Steel	Snap Hook	UFC401101	1
D	UFS310030(SS)	30 ft.	Stainless Steel	Snap Hook	UFC401101	1
E	UFS310050	50 ft.	Galvanized Steel	Snap Hook	UFC401101	1
E	UFS310050(SS)	50 ft.	Stainless Steel	Snap Hook	UFC401101	1
F	UFS310090	90 ft.	Galvanized Steel	Snap Hook	UFC401101	1

BRUTE™ SRL SERIES - WIRE CABLE

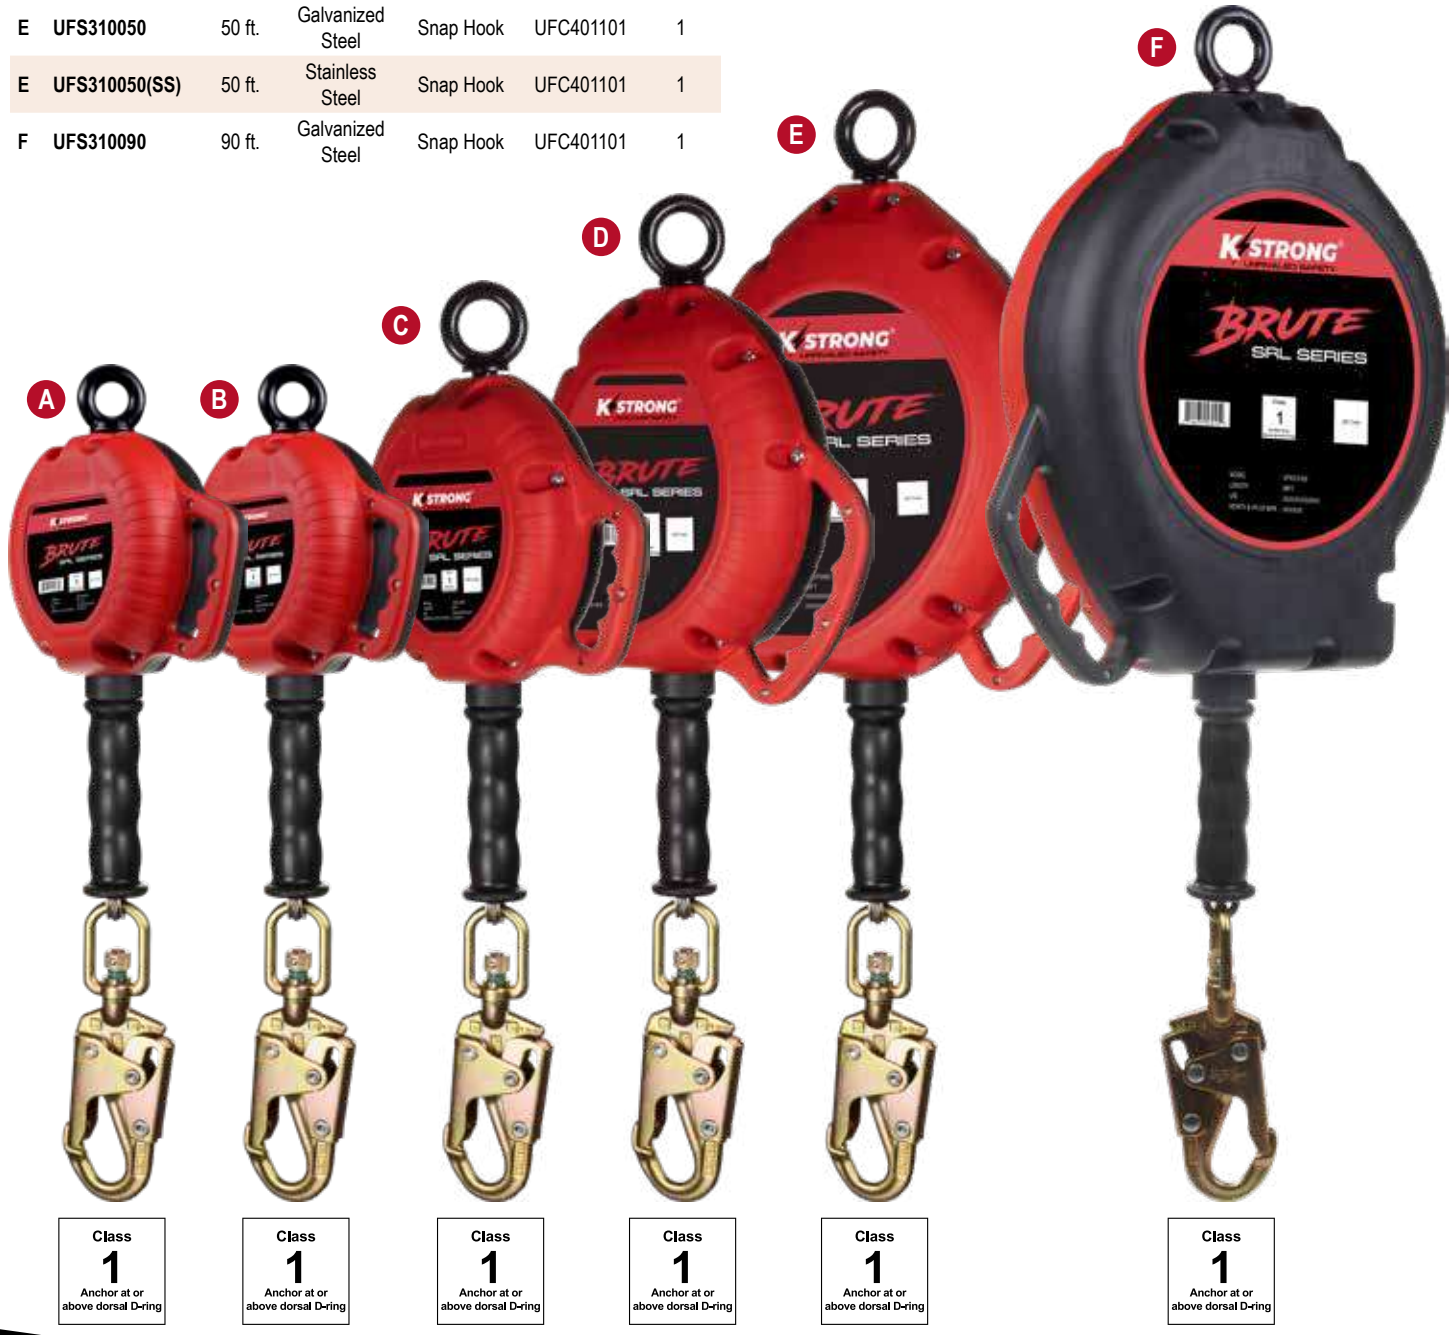

BRUTE™ & BRUTE-AL™ SRL Class 1 Series - Wire Cable | Overhead

	Model	Length	Cable Type	Case	Attachment End	Installation Carabiner	Tag Line	Class
G	UFS310130	30 ft.	Galvanized Steel	Polymer	Carabiner	UFC401101	Included	1
H	UFS310150	50 ft.	Galvanized Steel	Polymer	Carabiner	UFC401101	Included	1
J	UFS480020	20 ft.	Galvanized Steel	Aluminum	Snap Hook	UFC401101	Included	1
K	UFS480030	30 ft.	Galvanized Steel	Aluminum	Snap Hook	UFC401101	Included	1
L	UFS480050	50 ft.	Galvanized Steel	Aluminum	Snap Hook	UFC401101	Included	1



UFC401101 Carabiner included with every BRUTE™ SRL and SRL-LE. Tag Lines also included for all models 18 ft. and longer.

BRUTE™ SRL SERIES - WIRE CABLE

BRUTE 13 AL ALUMINUM™ SRL SERIES

Rugged Durable Aluminum Housing



BRUTE™ Class 1 SRL Series - Web | Overhead

	Model	Length	Cable Type	Attachment End	Installation Carabiner	Tag Line	Class
A	**UFS350011**	11 ft.	Webbing	Snap Hook	UFC401101		1
B	**UFS354011**	11 ft.	Webbing	Rebar Hook	UFC401101		1
C	**UFS350025**	25 ft.	Webbing	Snap Hook	UFC401101	Included	1

BRUTE™ SRL SERIES - WEB









UFC401101 Carabiner included with every BRUTE™ SRL and SRL-LE. Tag Lines also included for all models 18 ft. and longer.

BRUTE™ Class 1 SRL Series - Web | Personal

	Model	Length	Lifeline	Attachment End	Installation Carabiner	Class
D	UFS359206	9 ft. (6 ft. internal, 3 ft. external)	Hi-Abrasion Resistant Dyneema Web	Forged Rebar Hook	UFC409151	1
E	UFS359206D			Twin Forged Rebar Hooks	UFC409151	1
F	UFS359506			Tie-back Hook	UFC409151	1
G	UFS359506D			Twin Tie-back Hooks	UFC409151	1
H	UFS359506AR			Aluminum Rebar Hook	UFC409151	1
J	UFS359506S			Forged Snap Hook	UFC409151	1
K	UFS389006D			Twin Tie-back Hooks	UFC401400	1

BRUTE™ SRL SERIES - WEB

Class 1 Anchor at or above dorsal D-ring

Class 1 Anchor at or above dorsal D-ring

Class 1 Anchor at or above dorsal D-ring

Class 1 Anchor at or above dorsal D-ring









BRUTE™ LE Class 2 SRL Series - Wire Cable | Leading Edge (LE) Rated

BRUTE™ LE SRL SERIES



	Model	Length	Installation Carabiner	Tag Line	Class
A	**UFS310018L**	18 ft.	UFC401101	Included	2
B	**UFS310025L**	25 ft.	UFC401101	Included	2
B	**UFS310030L**	30 ft.	UFC401101	Included	2
C	**UFS310050L**	50 ft.	UFC401101	Included	2
D	**UFS310080L**	80 ft.	UFC401101	Included	2



UFC401101 Carabiner included with every BRUTE™ SRL and SRL-LE. Tag Lines also included for all models 18 ft. and longer.

BRUTE-AL™ LE Class 2 SRL

Wire Cable Leading Edge (LE) Rated

Rugged Durable Aluminum Housing

BRUTE LEADING EDGE 13 AL ALUMINUM™



	Model	Length	Installation Carabiner	Tag Line	Class
E	UFS480020L	20 ft. LE	UFC401101	Included	2
F	UFS480025L	25 ft. LE	UFC401101	Included	2
G	UFS480050L	50 ft. LE	UFC401101	Included	2



UFC401101 Carabiner included with every BRUTE™ SRL and SRL-LE. Tag Lines also included for all models 18 ft. and longer.

BRUTE Backer™ LE Class 2 SRL-P | Leading Edge (LE) Rated

BRUTE™ BACKER™ LE
WE'VE GOT YOUR BACK.

A



Class 2 Anchor above or below dorsal D-ring

C



Class 2 Anchor above or below dorsal D-ring

E



Class 2 Anchor above or below dorsal D-ring

G



Class 2 Anchor above or below dorsal D-ring


H




Class 2 Anchor above or below dorsal D-ring

Tie-Back Webbing


SELF-RETRACTING LIFELINES



Class 2
Anchor above or below dorsal D-ring

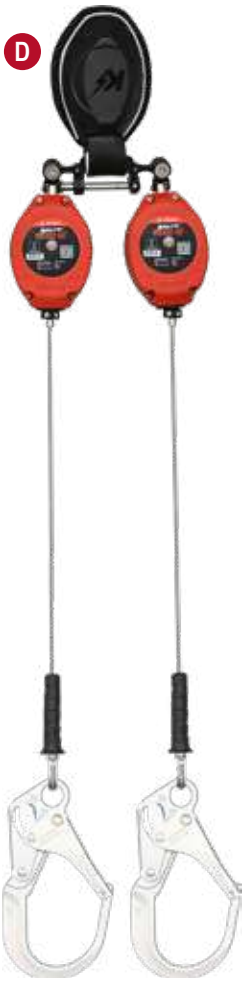

Class 2
Anchor above or below dorsal D-ring

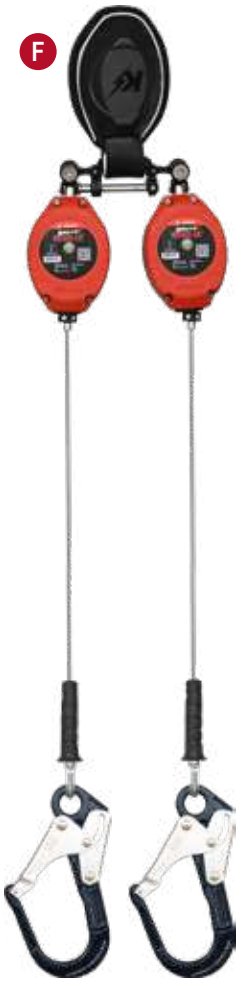

Class 2
Anchor above or below dorsal D-ring



Individual Legs are replaceable on the new Backer™ LE V2 models.





Closed

Open


	Model	Length	Description	Class
A	UFS310206L	8.5 ft.	Steel Snap Hook; comes with UFC409151	2
B	UFS310206LDV2	8.5 ft.	Twin Model - Steel Snap Hook	2
C	UFS314006L	8.5 ft.	Steel Rebar Hook; comes with UFC409151	2
D	UFS314006LDV2	8.5 ft.	Twin Model - Steel Rebar Hook	2
E	UFS316106L	8.5 ft.	Aluminum Rebar Hook; comes with UFC409151	2
F	UFS316106LDV2	8.5 ft.	Twin Model - Aluminum Rebar Hook	2
G	UFS319006L	7.5 ft. Cable; 2.5 ft. Web	Tie-back Hook; comes with UFC409151	2
H	UFS319006LDV2	7.5 ft. Cable; 2.5 ft. Web	Twin Model - Tie-back Hook	2
J	UFC409151		Twin/Single Connector (Steel Pin)	

BRUTE Backer™ LE Class 2 SRL-P | Leading Edge Web

BRUTE BACKER™ LE
WE'VE GOT YOUR BACK.

	Model	Length	Description	Class
A	UFS350206L	8.5 ft.	Steel Snap Hook; comes with UFC409151	2
B	UFS350206LDV2	8.5 ft.	Twin Model - Steel Snap Hook	2
C	UFS354006L	8.5 ft.	Steel Rebar Hook; comes with UFC409151	2
D	UFS354006LDV2	8.5 ft.	Twin Model - Steel Rebar Hook	2
E	UFS356106L	8.5 ft.	Aluminum Rebar Hook; comes with UFC409151	2
F	UFS356106LDV2	8.5 ft.	Twin Model - Aluminum Rebar Hook	2
G	UFC409151	Twin/Single Connector (Steel Pin)		



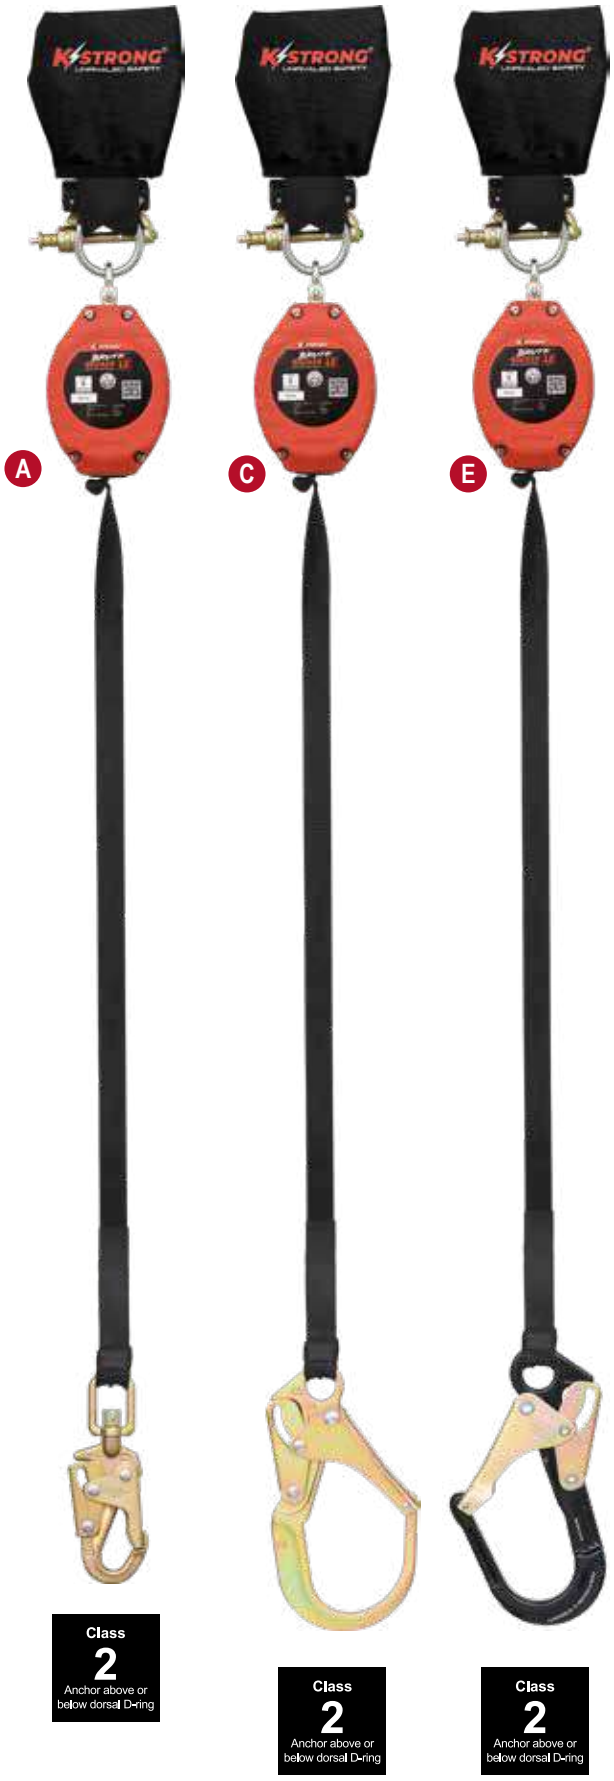


SELF-RETRACTING LIFELINES




B

Class
2
Anchor above or below dorsal D-ring

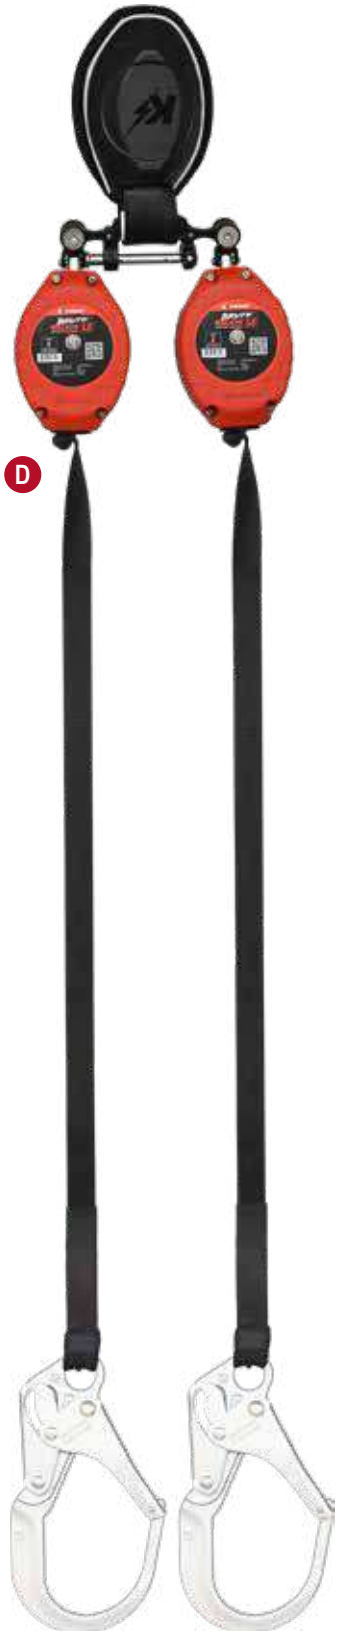

D

Class
2
Anchor above or below dorsal D-ring

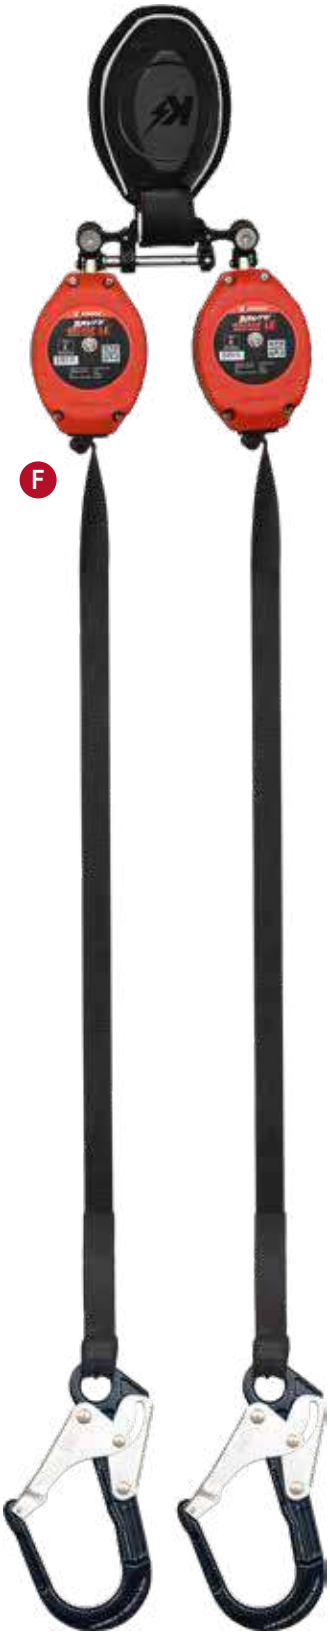

F

Class
2
Anchor above or below dorsal D-ring

BRUTE™ Sealed Class 1 SRL Series | Sealed Block SRL's (IP68 Level of IEC 60529) with Stainless Steel Cable



BRUTE™ SEALED SERIES

IP68 Level of IEC 60529

	Model	Length	Class
G	UFS570025	25 ft.	1
H	UFS570050	50 ft.	1
J	UFS570080	80 ft.	1
K	UFZ840030	Weather Cover for SRL's up to 30 ft.	
L	UFZ840100	Weather Cover for SRL's up to 100 ft.	
Tagline	AFZ830025	27 ft.	
Tagline	AFZ830050	52 ft.	
Tagline	AFZ830100	102 ft.	

Class 1 — Anchor at or above dorsal D-ring

Class 1 — Anchor at or above dorsal D-ring

Class 1 — Anchor at or above dorsal D-ring



Aluminum Carabiner included with every BRUTE™ Sealed SRL. Tag Lines also included.





KStrong® New SRL ANSI Standard

New ANSI Standards for Fall Protection SRLs


ANSI/ASSP Z359.14-2021 standard has been recently updated to minimize confusion in the market as to proper use of Self-Retracting Lifelines (SRLs) in relation to anchor height requirements. Beginning in April 2022, KStrong began transitioning manufacturing of SRLs from current ANSI Class A/Class B to the new Class 1/Class 2 standard.

Classification Changes

SRLs will now be classified by two new class ranges: Class 1 and Class 2. The table below identifies Class 1 SRLs that are to be used only on overhead anchorages and are subjected to a max free fall of 2 feet or less. Class 2 SRLs can only be used in applications where overhead anchorages may not be accessible and a structural edge is used instead; these can withstand a free fall of no more than 6 feet over an edge.

ANSI Z359.14-2014 (Old)	ANSI Z359.14-2021 (New)
Class A -Tested overhead with 282 lb. weight -Must arrest fall within 24" -Average force less than 1,350 lbs.	Class 1 -Tested overhead with 310 lb. weight -Must arrest fall within 42" -Average force less than 1,350 lbs.
Class B -Tested overhead with 282 lb. weight -Must arrest fall within 54" -Average force less than 900 lbs.	Class 2 -Meets Class 1 standards -Tested at foot level with 310 lb. weight -Arrest distance printed on label and instructions

SRLs must have Class 1 or Class 2 clearly labeled on the product as per the image below.

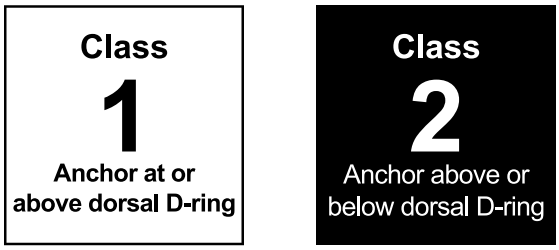


Also included in the ANSI Z359.14-2021 standard are testing requirements for a SRL-P, which is a self-retracting lanyard worn by the user on a full-body harness to be used as a fall arrest connector.

Class 1 and Class 2 KStrong products are now available in the United States.

KStrong is proud to announce the launch of its premium line of full body harnesses, EndurX™. With its industry-leading, patent-pending user-friendly quick slide torso adjusters, deluxe shoulder and leg padding with reflective piping, and lightweight aluminum hardware, the EndurX™ includes features designed with the end-user in mind. EndurX™ harnesses rank number 1 in comfort and fit.

EndurX™
FULL BODY HARNESS



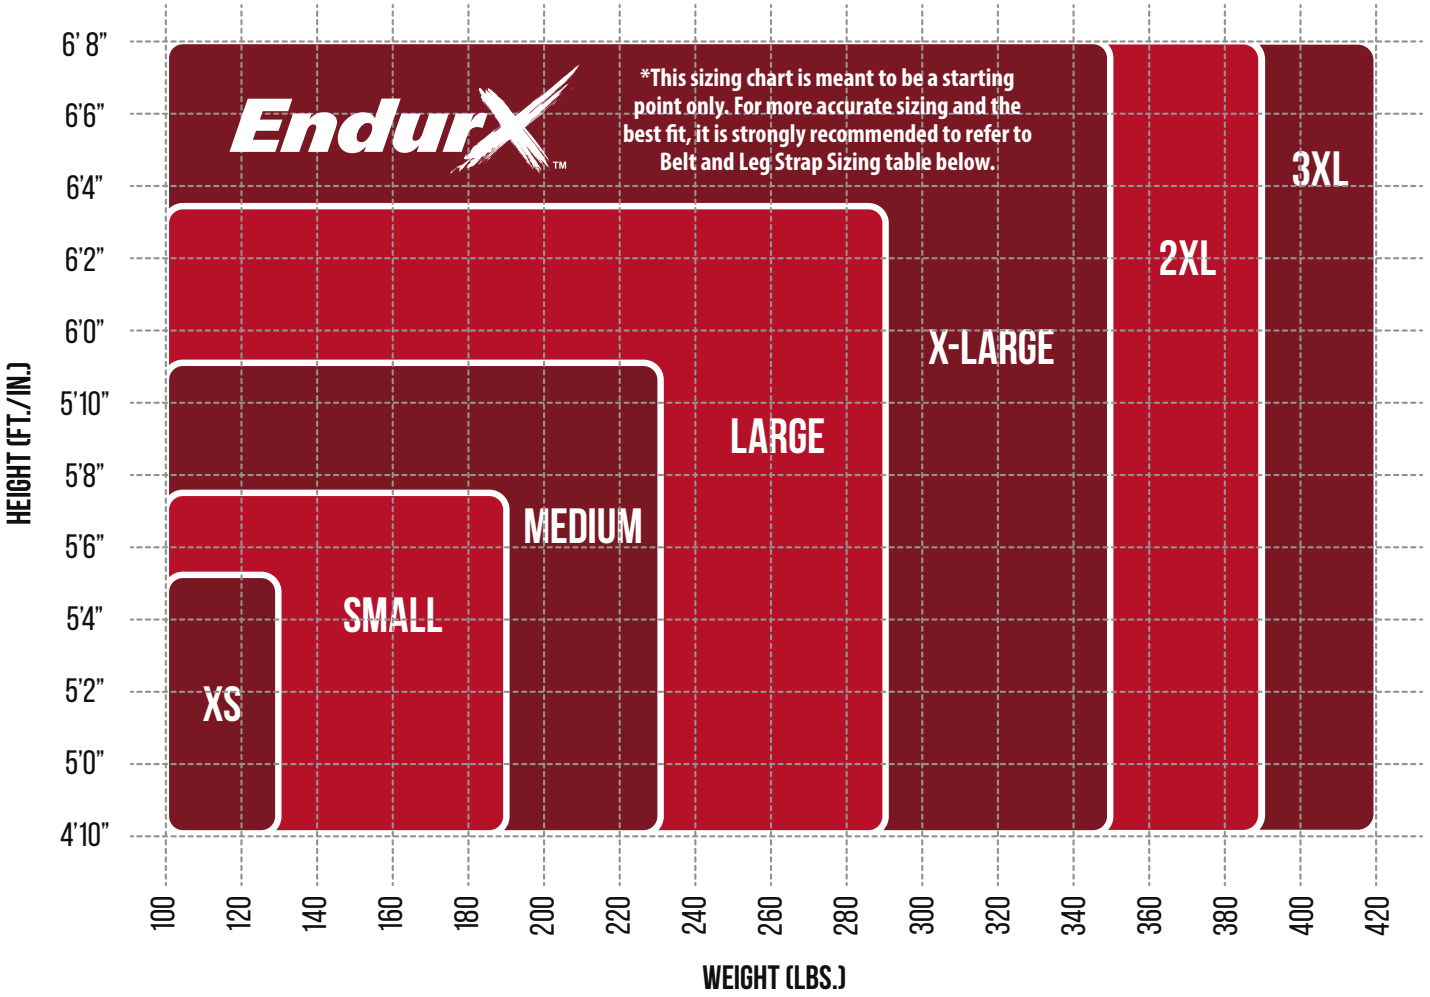

Belt & Leg Strap Sizing

Harness Size	Waist Circumference (in.)		Leg Circumference (in.)	
	Fully adjusted	Fully loose	Fully adjusted	Fully loose
XS	39.4	47.2	22	26
S	41.3	49.2	22	29.9
M	43.3	53.1	22	33.9
L	46.5	56.3	22	37.8
XL	48	59.8	22	41.7
2XL	51.2	63	22	45.7
3XL	53.1	66.9	22	49.6

EndurX™ Accessories

EndurX™ Harness Removable Tool Belt



Model	Length
UFZ801014(XS-S)	56"
UFZ801014(M-L)	62"
UFZ801014(XL-2XL)	68"
UFZ801014(3XL)	71"

UFZ801013 | EndurX™ Replacement Leg Pads. Only sold as pairs.



EndurX™ | 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Quick Slide Adjusters, Trauma Relief Straps, QC Chest, All Aluminum Hardware (ANSI)
Available Sizes: XS, S, M, L, XL, 2XL, 3XL

UFH10501G | Tongue Buckle Legs (Stainless Steel)



UFH10501Q | Quick Connect Legs



EndurX™ | 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Trauma Relief Straps, QC Chest, All Aluminum Hardware (ANSI)
Available Sizes: XS, S, M, L, XL, 2XL, 3XL

UFH10511G | Tongue Buckle Legs (Stainless Steel), Front D-ring



UFH10511Q | Tongue Buckle Legs (Stainless Steel), Front D-ring



EndurX™ | 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Quick Slide Adjusters, Trauma Relief Straps, QC Chest, All Aluminum Hardware (ANSI)
Available Sizes: XS, S, M, L, XL, 2XL, 3XL

UFH10531G | Tongue Buckle Legs (Stainless Steel), Side D-rings



UFH10531Q | Quick Connect Legs, Side D-rings



EndurX™ | 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Quick Slide Adjusters, Trauma Relief Straps, QC Chest, All Aluminum Hardware (ANSI)
Available Sizes: XS, S, M, L, XL, 2XL, 3XL

UFH10533G | Tongue Buckle Legs (Stainless Steel), Shoulder D-rings



UFH10533Q | Quick Connect Legs, Shoulder D-rings



EndurX™ | 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Trauma Relief Straps, QC Chest, All Aluminum Hardware (ANSI)
Available Sizes: XS, S, M, L, XL, 2XL, 3XL

UFH10541G | Tongue Buckle Legs (Stainless Steel), Front & Shoulder D-rings



UFH10541Q | Quick Connect Legs, Front and Shoulder D-rings



EndurX™ | 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Quick Slide Adjusters, Trauma Relief Straps, QC Chest, All Aluminum Hardware (ANSI)
Available Sizes: XS, S, M, L, XL, 2XL, 3XL

UFH10551G | Tongue Buckle Legs (Stainless Steel), Side and Front D-rings



UFH10551Q | Quick Connect Legs, Side and Front D-rings



EndurX™ | 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Premium Work Positioning Waist Pad w/ Removable Tool Belt, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Quick Slide Adjusters, Four (4) Tool Tether Tails, Trauma Relief Straps, QC Chest, All Aluminum Hardware (ANSI) | Available Sizes: XS, S, M, L, XL, 2XL, 3XL

UFH11502G | Tongue Buckle Legs (Stainless Steel), Side D-rings



UFH11502Q | Quick Connect Legs, Side D-rings



EndurX™ | 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Premium Work Positioning Waist Pad w/ Removable Tool Belt, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Four (4) Tool Tether Tails, Trauma Relief Straps, QC Chest, All Aluminum Hardware (ANSI) | Available Sizes: XS, S, M, L, XL, 2XL, 3XL

UFH11512G | Tongue Buckle Legs (Stainless Steel), Side and Front D-rings



UFH11512Q | Quick Connect Legs, Side and Front D-rings



Kapture™ Epic | 5-point Adjustment, Comfort Back Pad & Belt | Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

UFH10332G | Quick Connect Chest, Tongue Buckle Legs, Enhanced Dorsal D-ring Plus, Side D-rings

KAPTURE™ EPIC LV3 || FULL BODY HARNESS



UFZ850100 Trauma Relief Straps Included

UFH10332P | Quick Connect Chest & Legs, Enhanced Dorsal D-ring Plus, Side D-rings



UFZ850100 Trauma Relief Straps Included

Kapture™ Epic | 5-point Adjustment, Comfort Back Pad & Belt | Available Sizes: S-M, M-L, L-XL, XL-2XL

UFH10341G | Quick Connect Chest, Tongue Buckle Legs, Enhanced Dorsal D-ring Plus, Front & Side D-rings

KAPTURE™ EPIC LV3 || FULL BODY HARNESS



UFZ850100 Trauma Relief Straps Included

Kapture™ Element | 5-point Adjustment, Revolta™ Oil and Water Repellent Webbing Available Sizes: S-M, M-L, L-XL, XL-2XL

UFH10801GQ | Quick Connect Chest, Tongue Buckle Legs, Enhanced Dorsal D-ring Plus

KAPTURE™ ELEMENT LV4 || FULL BODY HARNESS



Kapture™ Element | 5-point Adjustment, Revolta™ Oil and Water Repellent Webbing Available Sizes: S-M, M-L, L-XL, XL-2XL

KAPTURE™ ELEMENT LV4 || FULL BODY HARNESS

UFH10802Q | Back/Shoulder Pad, Quick Connect Chest & Legs, Enhanced Dorsal D-ring Plus, Trauma Relief Straps



UFZ850100 Trauma Relief Straps Included

Kapture™ Element | 5-point Adjustment, Revolta™ Oil and Water Repellent Webbing Available Sizes: S-M, M-L, L-XL, XL-2XL

KAPTURE™ ELEMENT LV4 || FULL BODY HARNESS

UFH10811GQ | Quick Connect Chest, Tongue Buckle Legs, Enhanced Dorsal D-ring Plus, Front D-ring



Kapture™ Element | Arc Flash Rated 5-point Adjustment | Available Sizes: Universal (S-L), L-XL

KAPTURE™ ELEMENT LV4 || FULL BODY HARNESS

UFH10700P | Mating Buckle Legs & Chest



UFH10701P | Mating Buckle Legs & Chest, Side D-rings



Kapture™ Element | Arc Flash Rated 5-point Adjustment | Available Sizes: Universal (S-L), L-XL

KAPTURE™ ELEMENT
LV4 || FULL BODY HARNESS

UFH10710P | Mating Buckle Legs & Chest, Front D-ring



UFH10711P | Mating Buckle Legs & Chest, Web Loop Dorsal and Front D-rings



Kapture™ Element | Arc Flash Rated 5-point Adjustment, Back/Shoulder Pad | Available Sizes: Universal (S-L), L-XL

KAPTURE™ ELEMENT
LV4 || FULL BODY HARNESS

UFH10731P | Padded Belt, MB Legs & Chest, Side D-rings



UFH10732P | Padded Belt, MB Legs & Chest, Front & Side D-rings



Kapture™ Element | Welding with Flame Retardant (FR) Webbing, 5-point Adjust | Sizes: S-M, M-L, L-XL, XL-2XL

KAPTURE™ ELEMENT
LV4 || FULL BODY HARNESS

UFH19902GQFR | Quick Connect Chest, Tongue Buckle Legs, Spring Roller Buckles



UFH19902PFR | MB Legs & Chest, Spring Roller Buckles



Kapture™ Element | Welding with Flame Retardant (FR) Webbing, 5-point Adjust | Sizes: S-M, M-L, L-XL, XL-2XL

KAPTURE™ ELEMENT
LV4 || FULL BODY HARNESS

UFH19902QFR | Quick Connect Legs & Chest



UFH19903PQFR | Quick Connect Legs, MB Chest, Spring Roller Buckles, Side D-rings



Kapture™ Element | Oil & Gas Derrick Series, 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL

KAPTURE™ ELEMENT
LV4 || FULL BODY HARNESS

UFH90131G | Tongue Buckle Legs & Side D-rings



UFH90141G | Tongue Buckle Legs & Side D-rings, Dorsal D-ring with Sewn In 18" Extension D-ring



Kapture™ Element | Oil & Gas Derrick Series, 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL

KAPTURE™ ELEMENT
LV4 || FULL BODY HARNESS

UFH90341G | Comfort Shoulder/Back Pad with Padded Belt, Tongue Buckle Legs & Side D-rings, Back Belt D-ring and Dorsal D-ring with Sewn In 18" Extension D-ring, Trauma Relief Straps



UFH90471G | Padded Belt, Tongue Buckle Legs & Side D-rings, Front and Dorsal D-ring with Sewn In 18" Extension D-ring, Removable Bosun Chair



Kapture™ Element | Oil & Gas Derrick Series Accessories

UFZ910001 | Oil and Gas Derrick Belly Belt with Two Connector Straps



UFZ910005 | Oil and Gas Derrick Belly Belt with Two Connector Buckles



UFZ920001 | Bosun Chair with Board, Lifting D-rings, Tool Clips



UFZ920011 | Bosun Chair with Padded Board, Padded Belt, Lifting D-rings, Tool Clips



Kapture™ Belts | Padded Waist Tool Belts with D-rings

UFZ840020 | 1 Rear Restraint D-ring with Removable Tool Belt



UFZ840010 | 2 Work Positioning Side D-rings with Removable Tool Belt



Kapture™ Elite+ | 5-point Adjustment, Shoulder/Back Pad | Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

UFH15201GQ | Tongue Buckle Legs, Quick Connect Chest, Enhanced Dorsal D-ring



Kapture™ Elite+ | 5-point Adjustment, Shoulder/Back Pad | Available Sizes: S-M, M-L, L-XL, XL-2XL

UFH15203GQ | Spring Torso Adjusters, Enhanced Aluminum Dorsal D-ring Plus, Quick Connect Chest, Multi-Flex Feature for Ease of Mobility, Tongue Buckle Legs



Kapture™ Elite+ | 5-point Adjust., Comfort Shoulder/Back Pad | Available Sizes: S-M, M-L, L-XL, XL-2XL

UFH152011GQ | Front D-ring, Tongue Buckle Legs, Quick Connect Chest



Kapture™ Elite+ | 5-point, Comfort Shoulder/Back Pad Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

UFH15201Q | Quick Connect Chest and Leg Buckles



Kapture™ Elite+ | 5-point Adjustment, Comfort Shoulder/Back Pad | Available Sizes: S-M, M-L, L-XL, XL-2XL

KAPTURE™ +PLUS LV2 || ELITE

UFH15231Q | Quick Connect Chest and Leg Buckles, Side D-rings



UFZ850100 Trauma Relief Straps Included

UFH15231GQ | Quick Connect Chest, Tongue Buckle Legs, Side D-rings



UFZ850100 Trauma Relief Straps Included

Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

KAPTURE™ ELITE LV2 || FULL BODY HARNESS

UFH10201GQ | QC Chest, Tongue Buckle Legs



Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

UFH10241G | Front D-ring, Shoulder D-rings, Tongue Buckle Legs



Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

UFH10201G | Tongue Buckle Legs



Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL

UFH10201P | Pass-Thru Legs



Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL

UFH10231G | Tongue Buckle Legs & Side D-rings



UFH10231P | Pass-Thru Legs & Side D-rings



Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL

KAPTURE™ ELITE
LV2 || FULL BODY HARNESS

UFH10251G | Climbing FBH, TB Legs, Front & Side D-rings



UFH10251P | Climbing FBH, PT Legs, Front & Side D-rings



Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

KAPTURE™ ELITE
LV2 || FULL BODY HARNESS

UFH10211G | Front D-ring, Tongue Buckle Legs



UFH10211P | Front D-ring, Pass-Thru Legs



Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

UFH10252P | Pass-Thru Legs, Front & Side D-rings



Kapture™ Elite | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL

UFH10261G | Tongue Buckle Legs, Front, Side, and Shoulder D-rings



Kapture™ Essential+ | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL

UFH16201GP | Tongue Buckle Legs & with Back/Shoulder Pad



UFH16201GP(BL) | Web Loop Added Under Dorsal D-ring, Tongue Buckle Legs & with Back/Shoulder Pad



When it comes to your fall protection equipment, a full-body harness is one of the most important equipment choices you can make. While KStrong harnesses are built to meet or exceed ANSI standards and OSHA regulations, we've also designed comfort, lumbar support, positioning D-rings and accessibility into our body wear to provide workers with continued freedom of movement, sustained safety, and improved productivity while working at height or in confined spaces. KStrong Essential™, Elite™, and Epic™ harnesses provide workers with a very high degree of confidence, which directly affects the worker's productivity. While many of our safety harnesses can be used on most jobs, we also manufacture innovative full-body harnesses for specific uses within different industries such as Oil and Gas, Utility, Tower, and Wind Energy.

KAPTURE™
HARNESS SERIES

Kapture™ Essential+ | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL

KAPTURE™ LV1 || ESSENTIAL +PLUS

UFH16001GP | Tongue Buckle Legs



Kapture™ Essential+ | 5-point Adjustment | Available Sizes: S-M, M-L, L-XL, XL-2XL

UFH16231GP | Back/Shoulder Pad and Waist Belt, 3 D-rings, Tongue Buckle Legs



UFH16231GP(BL)
Web Loop Added Under Dorsal D-ring, Back/ Shoulder Pad and Waist Belt, 3 D-rings, Tongue Buckle Legs

Kapture™ Essential | 3-point Adjustment | Available Sizes: Universal (S-L), L-XL

KAPTURE™ LV1 || ESSENTIAL FULL BODY HARNESS

UFH10101G | Tongue Buckle Legs

UFH16101G | Removable Shoulder Padding



UFH10101P | Pass-Thru Legs



Kapture™ Essential | 3-point Adjustment | Available Sizes: Universal (S-L), L-XL

KAPTURE™ ESSENTIAL
LV1 || FULL BODY HARNESS

UFH10131G | Tongue Buckle Legs & Side D-rings



UFH10131P | Pass-Thru Legs & Side D-rings



Kapture™ Essential | 3-point Adjustment | Available Sizes: Universal (S-L), L-XL

KAPTURE™ ESSENTIAL
LV1 || FULL BODY HARNESS

UFH10102G | Tongue Buckle Legs, Dorsal D-ring with Sewn In 18" Extension O-Ring



UFH10102P | Pass-Thru Legs, Dorsal D-ring with Sewn In 18" Extension O-Ring




Harness Accessories

UFZ850100 | Trauma Step-Up Relief; Retrofits to Most Harnesses





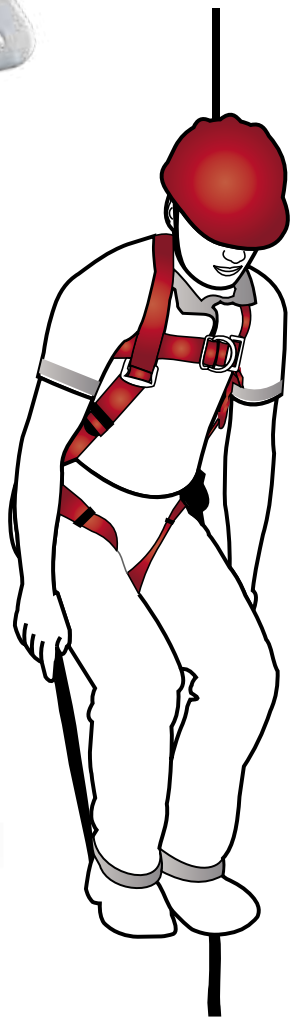

Instructional Video
Scan with camera to view a quick and informative safety video on this product.

Harness Accessories

UFZ800100 | 18" Clear Pack SAL with snap hook and D-ring



UFZ802001 | 18" Lanyard extender with snap hook, other end O-ring



UFZ800501 | 20" D-ring extender with loop, other end D-ring



Harness Accessories

UFZ801001 | Removable Shoulder Yoke Comfort Pad for use with full body harnesses



UFZ800200 | Replacement Lanyard Keeper with Large Ring



UFZ800201 | Flourescent Green Replacement Lanyard Keeper with Large Ring



UFZ200101 | Kit Bag - Small



Harness Accessories

UFZ801011 | 54" Removable Tool Belt


UFZ801012 | 60" Removable Tool Belt



Belt & Leg Strap Sizing

Harness Size	Waist Circumference (in.)	Leg Circumference (in.)
Small - Medium	*Belt not provided in this size*	24 - 37
Medium - Large	*Belt not provided in this size*	24 - 39
Universal (Small - Large)	33 - 46	27 - 42
Large - X-Large	33 - 49	27 - 43
X-Large - 2X-Large	33 - 50	27 - 45

Harness Sizing Chart

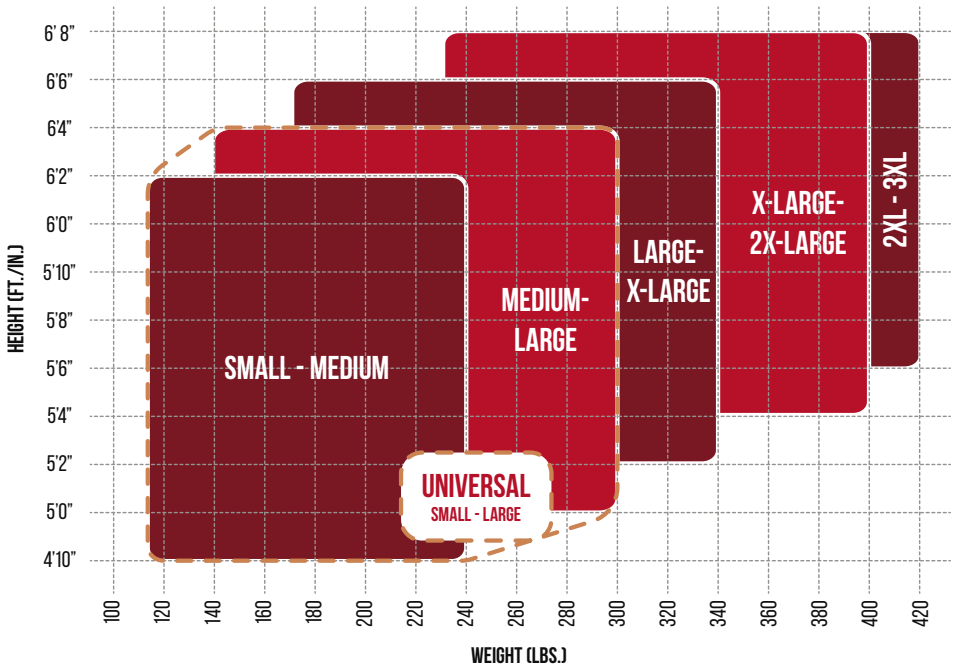

Harness Features Chart

Kapture™ Series	Model	Adjustment Points & Special Feature(s)	D-ring Configuration	Leg Straps			Belt	Pads	Available Sizes					Minimum Standards Met
				Pass Thru	Tongue Buckle	Quick Connect			Universal (S - L)	S - M	M - L	L - XL	XL - 2XL	
Essential	UFH10101P	3	Back (Dorsal)	⚡					⚡			⚡		OSHA & ANSI Z359.11-2021
Essential	UFH10101G	3	Back (Dorsal)		⚡				⚡			⚡		OSHA & ANSI Z359.11-2021
Essential	UFH16101G	3	Back (Dorsal)		⚡			Removable Shoulders & Back	⚡			⚡		OSHA & ANSI Z359.11-2021
Essential	UFH10102P	3	Back (Dorsal) with 18" Ext. O-ring	⚡					⚡			⚡		OSHA & ANSI Z359.11-2021
Essential	UFH10102G	3	Back (Dorsal) with 18" Ext. O-ring		⚡				⚡			⚡		OSHA & ANSI Z359.11-2021
Essential	UFH10131P	3	Back (Dorsal) & Sides	⚡					⚡			⚡		OSHA & ANSI Z359.11-2021
Essential	UFH10131G	3	Back (Dorsal) & Sides		⚡				⚡			⚡		OSHA & ANSI Z359.11-2021
Essential+	UFH16001GP	5	Back (Dorsal)		⚡					⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Essential+	UFH16201GP	5	Back (Dorsal)		⚡			Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Essential+	UFH16201GP (BL)	5	Back (Dorsal) with Web Loop		⚡			Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Essential+	UFH16231GP	5	Back (Dorsal) & Sides		⚡		⚡	Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Essential+	UFH16231GP (BL)	5	Back (Dorsal) with Web Loop & Sides		⚡		⚡	Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021

Harness Features Chart

Kapture™ Series	Model	Adjustment Points & Special Feature(s)	D-ring Configuration	Leg Straps			Belt	Pads	Available Sizes					Minimum Standards Met
				Pass Thru	Tongue Buckle	Quick Connect			Universal (S - L)	S - M	M - L	L - XL	XL - 2XL	
Elite	UFH10201P	5	Back (Dorsal)	⚡						⚡	⚡	⚡		OSHA & ANSI Z359.11-2021
Elite	UFH10201G	5	Back (Dorsal)		⚡					⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Elite	UFH10201GQ	5	Back (Dorsal)		⚡	Chest				⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Elite	UFH10211P	5	Back (Dorsal), Front	⚡						⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Elite	UFH10211G	5	Back (Dorsal), Front		⚡					⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Elite	UFH10231P	5	Back (Dorsal) & Sides	⚡						⚡	⚡	⚡		OSHA & ANSI Z359.11-2021
Elite	UFH10231G	5	Back (Dorsal) & Sides		⚡					⚡	⚡	⚡		OSHA & ANSI Z359.11-2021
Elite	UFH10241G	5	Back (Dorsal), Front, Shoulder		⚡					⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Elite	UFH10251P	5, Crossover Design	Back (Dorsal), Front & Sides	⚡						⚡	⚡	⚡		OSHA & ANSI Z359.11-2021
Elite	UFH10251G	5, Crossover Design	Back (Dorsal), Front & Sides		⚡					⚡	⚡	⚡		OSHA & ANSI Z359.11-2021
Elite	UFH10252P	5	Back (Dorsal), Front & Sides	⚡						⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Elite	UFH10261G	5	Back (Dorsal), Front, Shoulder, & Sides		⚡					⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Elite+	UFH15201GQ	5	Enhanced Back (Dorsal)		⚡	Chest		Shoulders & Back		⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Elite+	UFH152011GQ	5	Enhanced Back (Dorsal), Front		⚡	Chest		Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Elite+	UFH15201Q	5	Enhanced Back (Dorsal)			⚡ + Chest		Shoulders & Back		⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Elite+	UFH15203GQ	5, Multi-Flex, Spring Torso Adjusters	Enhanced Back (Dorsal)		⚡	Chest		Removable Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Elite+	UFH15231Q	5	Enhanced Back (Dorsal) & Sides			⚡ + Chest		Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Elite+	UFH15231GQ	5	Enhanced Back (Dorsal) & Sides		⚡	Chest		Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Epic	UFH10332P	5	Enhanced Back (Dorsal) & Sides			⚡ + Chest	⚡	Shoulders & Back		⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Epic	UFH10332G	5	Enhanced Back (Dorsal) & Sides		⚡	Chest	⚡	Shoulders & Back		⚡	⚡	⚡	XL-2X, 2X-3X	OSHA & ANSI Z359.11-2021
Epic	UFH10341G	5	Enhanced Back (Dorsal), Front & Sides		⚡	Chest	⚡	Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021

Harness Features Chart

Kapture™ Series	Model	Adjustment Points & Special Feature(s)	D-ring Configuration	Leg Straps			Belt	Pads	Available Sizes					Minimum Standards Met
				Pass Thru	Tongue Buckle	Quick Connect			Universal (S - L)	S - M	M - L	L - XL	XL - 2XL	
Element	UFH10801GQ	5, Revolta™ Oil and Water Repellent	Enhanced Back (Dorsal)		⚡	Chest				⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH10802Q	5, Revolta™ Oil and Water Repellent, Trauma Relief Straps	Enhanced Back (Dorsal)			⚡ + Chest		Removable Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH10811GQ	5, Revolta™ Oil and Water Repellent	Enhanced Back (Dorsal), Front		⚡	Chest				⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH10700P	5, Arc Flash Rated	Back (Dorsal)	⚡					⚡			⚡		OSHA & ANSI Z359.11-2021, ASTM F887-20
Element	UFH10701P	5, Arc Flash Rated	Back (Dorsal) & Sides	⚡					⚡			⚡		OSHA & ANSI Z359.11-2021, ASTM F887-20
Element	UFH10710P	5, Arc Flash Rated	Back (Dorsal), Front	⚡					⚡			⚡		OSHA & ANSI Z359.11-2021, ASTM F887-20
Element	UFH10711P	5, Arc Flash Rated	Back (Dorsal), Front Web Loops	⚡					⚡			⚡		OSHA & ANSI Z359.11-2021, ASTM F887-20
Element	UFH10731P	5, Arc Flash Rated	Back (Dorsal) & Sides	⚡			⚡	Removable Shoulders & Back	⚡			⚡		OSHA & ANSI Z359.11-2021, ASTM F887-20
Element	UFH10732P	5, Arc Flash Rated	Back (Dorsal), Front & Sides	⚡			⚡	Removable Shoulders & Back	⚡			⚡		OSHA & ANSI Z359.11-2021, ASTM F887-20
Element	UFH19902GQFR	5, FR Webbing, Spring Roller Buckles	Back (Dorsal)		⚡	Chest				⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH19902PFR	5, FR Webbing, Spring Roller Buckles	Back (Dorsal)	⚡						⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH19902QFR	5, FR Webbing	Back (Dorsal)			⚡ + Chest				⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH19903PQFR	5, FR Webbing, Spring Roller Buckles	Back (Dorsal) & Sides	Chest		⚡				⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH90131G	5, Oil & Gas Derrick	Back (Dorsal) & Sides	Chest	⚡			Small Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH90141G	5, Oil & Gas Derrick	Back (Dorsal) with 18" Ext. D-ring, Sides	Chest	⚡			Small Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH90341G	5, Oil & Gas Derrick, Trauma Relief Straps	Back (Dorsal) with 18" Ext. D-ring, Sides, Back Belt	Chest	⚡		⚡	Shoulders & Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
Element	UFH90471G	5, Oil & Gas Derrick	Back (Dorsal) with 18" Ext. D-ring, Front, Sides, Removable Bosun Chair	Chest	⚡		⚡	Small Back		⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021

Harness Features Chart

Harness Series	Model	Adjustment Points & Special Features	In addition to Enhanced Back D-ring Configuration			Leg Straps		Belt	Pads	Available Sizes							Minimum Standards Met
			Side	Front	Shoulder	Tongue Buckle	Quick Connect			XS	S	M	L	XL	2XL	3XL	
EndurX™	UFH10501G	5, Quick Slide Adjusters, Trauma Relief Straps, All Aluminum Hardware				⚡ (SS)	Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10501Q	5, Quick Slide Adjusters, Trauma Relief Straps, All Aluminum Hardware					⚡ + Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10511G	5, Premium Adjusters, Trauma Relief Straps, All Aluminum Hardware		⚡		⚡ (SS)	Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10511Q	5, Premium Adjusters, Trauma Relief Straps, All Aluminum Hardware		⚡			⚡ + Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10531G	5, Quick Slide Adjusters, Trauma Relief Straps, All Aluminum Hardware	⚡			⚡ (SS)	Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10531Q	5, Quick Slide Adjusters, Trauma Relief Straps, All Aluminum Hardware	⚡				⚡ + Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10533G	5, Quick Slide Adjusters, Trauma Relief Straps, All Aluminum Hardware			⚡	⚡ (SS)	Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10533Q	5, Quick Slide Adjusters, Trauma Relief Straps, All Aluminum Hardware			⚡		⚡ + Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10541G	5, Premium Adjusters, Trauma Relief Straps, All Aluminum Hardware		⚡	⚡	⚡ (SS)	Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10541Q	5, Premium Adjusters, Trauma Relief Straps, All Aluminum Hardware		⚡	⚡		⚡ + Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10551G	5, Premium Adjusters, Trauma Relief Straps, All Aluminum Hardware	⚡	⚡		⚡ (SS)	Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH10551Q	5, Premium Adjusters, Trauma Relief Straps, All Aluminum Hardware	⚡	⚡			⚡ + Chest		Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH11502G	5, Quick Slide Adjusters, Trauma Relief Straps, All Aluminum Hardware	⚡			⚡ (SS)	Chest	⚡	Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH11502Q	5, Quick Slide Adjusters, Trauma Relief Straps, All Aluminum Hardware	⚡				⚡ + Chest	⚡	Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH11512G	5, Premium Adjusters, Trauma Relief Straps, All Aluminum Hardware	⚡	⚡		⚡ (SS)	Chest	⚡	Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021
EndurX™	UFH11512Q	5, Premium Adjusters, Trauma Relief Straps, All Aluminum Hardware	⚡	⚡			⚡ + Chest	⚡	Abrasion Resistant Shoulder Pad & Deluxe Leg Pads w/ Reflective Piping	⚡	⚡	⚡	⚡	⚡	⚡	⚡	OSHA & ANSI Z359.11-2021

CONNECTORS

KStrong's extensive selection of connectors for fall arrest, work positioning, and restraint applications is built on years of dependable design, construction, performance, and quality through rigorous testing to provide your worker with ultimate protection. As we manufacture all our connectors in-house including all hardware (snap hooks, carabiners, etc.), you are guaranteed products of the highest quality all backed by industry-preferred Level 3 ANSI independent 3rd-party testing documentation. When you need to be connected, rest assured KStrong has the right equipment for the job!

	Model	Length	Shock Absorption	Description
A	UFL204101	6 ft.	Internal	Snap Hooks
B	UFL204111	6 ft.	Internal	Snap Hook & Rebar Hook

	Model	Length	Shock Absorption	Description
C	UFL204121	6 ft.	Internal	Y with Snap Hooks
D	UFL204131	6 ft.	Internal	Y with Rebar Hooks

Energy Absorbing Lanyards | 6 ft. Internal Shock Absorption



CONNECTORS

	Model	Length	Shock Absorption	Description
E	UFL206101	4.5 - 6 ft.	Internal - Elasticated	Snap Hooks
F	UFL206111	4.5 - 6 ft.	Internal - Elasticated	Snap Hook & Rebar Hook
G	UFL206121	4.5 - 6 ft.	Internal - Elasticated	Y with Snap Hooks
H	UFL206131	4.5 - 6 ft.	Internal - Elasticated	Y with Rebar Hooks
J	UFL206214	4.5 - 6 ft.	Internal - Elasticated	Aluminum Snap Hook & Rebar Hook
K	UFL206234	4.5 - 6 ft.	Internal - Elasticated	Y with Aluminum Rebar Hooks

Energy Absorbing Lanyards | Elasticated 4.5 ft. - 6 ft.











CONNECTORS

	Model	Length	Shock Absorption	Description
A	UFL201101(03)	3 ft.	Clear Shock Pack	Snap Hooks
B	UFL201101(04)	4 ft.	Clear Shock Pack	Snap Hooks
C	UFL201101	6 ft.	Clear Shock Pack	Snap Hooks
D	UFL201111	6 ft.	Clear Shock Pack	Snap Hook & Rebar Hook
E	UFL201121(04)	4 ft.	Clear Shock Pack	Y with Snap Hooks
F	UFL201121	6 ft.	Clear Shock Pack	Y with Snap Hooks
G	UFL201131	6 ft.	Clear Shock Pack	Y with Rebar Hooks
H	UFL201421	6 ft.	Clear Shock Pack	Y with Tie-back Hooks

Energy Absorbing Lanyards | 6 ft. Clear Shock Pack







	Model	Length	Shock Absorption	Description
J	**UFL201301**	4.5 - 6 ft.	Clear Shock Pack	Adjustable with Snap Hooks
K	**UFL201331**	4.5 - 6 ft.	Clear Shock Pack	Adjustable Y with Rebar Hooks

	Model	Length	Shock Absorption	Description
L	**UFL201402**	6 ft.	Clear Shock Pack	Adjustable 4.5'-6' with snap hook and one tie-back hook
M	**UFL201422**	6 ft.	Clear Shock Pack	Y with Tie-back Hooks & Adjustable D-rings

Energy Absorbing Lanyards | 4.5 - 6 ft. Adjustable with Clear Shock Pack





	Model	Length	Shock Absorption	Description
A	UFL201601	6 ft.	Clear Shock Pack	LE Rated with Snap Hooks
B	UFL201611	6 ft.	Clear Shock Pack	LE Rated with Rebar Hook

	Model	Length	Shock Absorption	Description
C	UFL201621	6 ft.	Clear Shock Pack	LE Rated Y with Snap Hooks
D	UFL201622	6 ft.	Clear Shock Pack	LE Rated Y with Rebar Hooks

Energy Absorbing Lanyards | LE Rated for up to 12 ft. Free-fall



	Model	Length	Shock Absorption	Description
E	UFL201701	6 ft.	Shock Pack	Dielectric Arc Flash Rated with Snap & Rebar Hook
F	UFL201721	6 ft.	Shock Pack	Y Dielectric Arc Flash Rated with Rebar Hooks

	Model	Length	Shock Absorption	Description
G	UFL201740	6 ft.	Shock Pack	Dielectric Arc Flash Rated with Snap Hook & Loop
H	UFL201750	6 ft.	Shock Pack	Y Dielectric Arc Flash Rated with Snap Hooks and Loop

Energy Absorbing Lanyards | 6 ft. Arc Flash



ARC FLASH RATED

ASTM F887-18



	Model	Length	Shock Absorption	Description
A	UFL205201	6 ft.	N/A	Snap Hooks
B	UFL205215	4.5 - 6 ft.	N/A	Adjustable with Forged Steel Snap Hooks
C	UFL205211	4.5 - 6 ft.	N/A	Adjustable with Snap Hooks
D	UFL205201(02)	2 ft.	N/A	Snap Hooks
E	UFL205201(03)	3 ft.	N/A	Snap Hooks
F	UFL205401		N/A	WPL Chain Assembly
G	UFL205251		N/A	WPL Web Assembly

Work Positioning Lanyards & Devices



COMBO KITS

Harness & Lanyard Combo Kits

UFK10010 | 3 pt. FBH, MB Legs, and 6' Internal SAL with Snap Hooks | Sizes: S-L, L-XL



UFK10015 | 3 pt. FBH, MB Legs, and 6' Internal SAL with Loop & Snap Hook | Sizes: S-L, L-XL



UFK10025 | 3 pt. FBH, MB Legs, and 6' Internal SAL Twin Leg 100% Tie Off with Loop & Rebar Hooks | Sizes: S-L, L-XL



UFK20010 | 5 pt. FBH, MB Legs, and 6' Internal SAL with Snap Hooks | Sizes: S-M, M-L, L-XL



UFK20015 | 5 pt. FBH, MB Legs, and 6' Internal SAL with Loop & Snap Hook | Sizes: S-M, M-L, L-XL



UFK20025 | 5 pt. FBH, MB Legs, and 6' Internal SAL Twin Leg 100% Tie Off with Loop & Rebar Hooks | Sizes: S-M, M-L, L-XL



Harness & Lanyard Aerial Kits

UFK20510 | 5pt. FBH, TB Legs, and Micron™ SRL with Snap Hook, Includes Carabiner | Sizes: S-M, M-L, L-XL, XL-2XL, 2XL-3XL



UFK20511 | 5pt. FBH, MB Legs, and Micron™ SRL with Snap Hook, Includes Carabiner | Sizes: L-XL



UFK20410 | Aerial Kit with 3 pt. FBH, MB Legs, and 4.5 - 6 ft. Adjustable WPL with Snap Hooks | Sizes: S-L, L-XL



UFK23110 | Aerial Bucket Kit with 5 pt. FBH, TB Legs, and 6' Clear Pack SAL with Snap Hooks | Sizes: S-M, M-L, L-XL



COMPETENT PERSON FALL PROTECTION CERTIFICATION TRAINING

OVERALL COURSE OBJECTIVE

Competent Person Fall Protection certification training course is designed to introduce safety professionals, construction inspectors and similar personnel with current and updated knowledge of the fall protection principles, hazard identification, fall protection systems, program development/implementation and relevant standards and regulations.

Course covers the use, selection and installation of conventional and non-conventional fall protection equipment. This course also addresses relevant fall protection regulations and fall hazard identification. These components, combined with the hands-on set-up of fall protection systems, instill a working knowledge of all the essential elements of a fall protection program. The course curriculum includes both classroom sessions and practical hands-on exercises.



Written and practical tests are administered to ensure that students understand the principles presented. Documentation is available to satisfy due diligence and regulatory requirements.

In addition, comprehensive training will be provided on proper inspection methods of Personal Fall Arrest Equipment.

Continuing Education Credits

This course qualifies for 1.6 Continuing Education Credits (CEU) which will be specified on each certificate received by attendees who complete their training.

ANCHORAGES

Selecting an appropriate anchorage connector for your fall arrest system is a critical element in protecting a worker from fall and confined space hazards. Designed to fit a broad scope of general and specific user applications, our offering of anchorage connectors meets those requirements head-on by providing a secure point of attachment. Fall arrest anchors are identified by what they connect to such as steel anchors, concrete anchors, roof anchors and specialty safety anchors designed for your unique applications. Your worker can work with confidence knowing each connector is rigorously Level 3 ANSI tested and meets or exceeds industry standards. For 2024, we are committed to expanding our offering of anchors to better protect your workers!

Anchors | Concrete & Steel

UFA30090 | 3/4" Removable Bolt Anchor for Concrete



UFA30080 | Removable Steel Girder Anchor



UFA30301 | Bolt-on steel two hole D-ring anchor



UFA30311 | Bully™ Swivel 10K Anchor for Metal Structure with 5/8", 4" Long Hex Head Bolt, Nut, and Washer



UFA30311(W) | Bully™ Swivel 10K Anchor (without bolt)



UFA30050 | Steel weld-on or bolt-on anchor point



Concrete Embed Anchor Straps

With Loop and D-ring



Model	Length
UFA20504	4 ft.
UFA20506	6 ft.

With Loops on Both Ends



Model	Length
UFA21004	4 ft.
UFA21006	6 ft.

Anchors | I-beam

UFA30110 | I-beam anchor, Adjustable to fit flange widths of 3.5” to 14”



UFA30115 | I-beam anchor, Adjustable to fit flange widths of 3.5” to 6”



UFA30130 | Aluminum and Steel Rolling Beam Anchor, adjustable 3.14” - 9.84”



UFA30111 | Column Mount Vertical Beam Anchor, adjustable 3.54” - 13.38”



Multipurpose Anchors | Web Slings



Choker Style Anchor Strap with Loop and D-ring

Model	Length
UFA20602	2 ft.
UFA20603	3 ft.
UFA20604	4 ft.



Flame Retardant (FR) Choker Style Anchor Strap with Loop and D-ring

Model	Length
UFA20602(FR)	2 ft.
UFA20603(FR)	3 ft.
UFA20604(FR)	4 ft.



Choker Style Anchor Strap with Wear Pad

Model	Length
UFA20003	3 ft.
UFA20004	4 ft.
UFA20006	6 ft.
UFA20010	10 ft.
UFA20016	16 ft.
UFA20024	24 ft.
UFA20030	30 ft.



Anchors | Wire Cable Slings

Wire Cable Sling, large and small O-rings



Model	Length
UFA710103	3 ft.
UFA710104	4 ft.
UFA710106	6 ft.

Wire Cable Sling with snap hook and large O-ring



Model	Length
UFA710003	3 ft.
UFA710004	4 ft.
UFA710006	6 ft.

Anchors | Drop Thru

UFA30501 | 5K Drop Thru Anchor with Swivel D-ring- 4" Round Plate with 6' Cable
UFA30501(04) | 5K Drop Thru Anchor with Swivel D-ring- 4" Round Plate with 4' Cable



Roofing Kits

UFB101025(L-XL) - 25 ft. Rope | **UFB101050(L-XL) -** 50 ft. Rope
Roofers Kit with 5-point Adjustable Harness (size L- XL), 25 ft. or 50 ft. Vertical 5/8" Diameter Polysteel Lifeline with snap hook on anchor and, other end taped, 3 ft. shock absorbing rope grab assembly, reusable hinged roof anchor, storage bucket and lid (ANSI)



UFB201050(L-XL) - Roofers Kit with Elite 5-Point MB Leg Harness Size L-XL, 50 ft. Vertical 5/8" Diameter Polysteel Lifeline with snap hook on anchor and, other end taped, 3 ft. shock absorbing openable non-captive self-tracking rope grab assembly, reusable hinged roof anchor, storage bucket and lid (ANSI))



UFB103050(M-L) - Roofers Kit with Elite 5-Point TB Leg Harness Size M-L, 50 ft. Vertical 5/8" Diameter Polysteel Lifeline with snap hook on anchor and, other end taped, 3 ft. shock absorbing rope grab assembly, reusable hinged roof anchor, storage bucket and lid (ANSI)



UFB102025(M-L) - Roofers Kit with Elite+ 5-Point TB Leg Harness Size M-L, Trauma Relief Straps, 25 ft. Vertical 5/8" Diameter Polysteel Lifeline with snap hook on anchor and, other end taped, 3 ft. shock absorbing rope grab assembly, reusable hinged roof anchor, storage bucket and lid (ANSI)





UFB501125(L-XL) - Roofers Boxed Kit with 3-point Adjustable Harness (size L- XL), 25 ft. Vertical 5/8" Diameter Polysteel Lifeline with snap hook on anchor end, other end folded with heat shrink cover, 3 ft. shock absorbing rope grab assembly, and reusable hinged roof anchor (ANSI).

Roofing Accessories

Polysteel 5/8" Rope
UFR100025 | 25 ft., **UFR100050 |** 50 ft., **UFR100100 |** 100 ft., **UFR100200 |** 200 ft., **UFR100500 |** 500 ft.



White Polydac Rope
UFR200025 | 25 ft., **UFR200050 |** 50 ft., **UFR200100 |** 100 ft., **UFR200200 |** 200 ft., **UFR200500 |** 500 ft.



White Polydac Rope w/ 2 Snap Hooks
UFR210025 | 25 ft., **UFR210050 |** 50 ft., **UFR210100 |** 100 ft., **UFR210200 |** 200 ft.



UFX903050 | Rope Termination Anchor



UFG602100 | 5/8" Stainless Steel Self-Tracking Rope Grab with Roller Guide



UFG601010 | Anti-panic Self-tracking Rope Grab for 5/8" Rope



UFG611020 | Manual 3 ft. Shock Absorbing Rope Grab Assembly



UFG611010 | 3' Self tracking non-captive openable shock absorbing rope grab assembly. For use on 5/8" rope.



UFA30015 | Single Use Steel, Raised
UFA30015N | Single Use Steel, Raised w/8 Nails



UFA30020 | Permanent Use Stainless Steel Roof Anchor with D-rings



UFA30021 | Permanent Use Stainless Steel 17" Roof Anchor with 1 Forged D-ring



UFA30001 | Hinged Reusable



UFA30010 | Single Use Steel



Additional Roof Anchors

Riser Post Roof Anchor for Concrete Decks
UFA55207SW(12) - 12”
UFA55207SW(18) - 18”



End Post for Fixed Systems
UFA55207E(12) - 12”
UFA55207E(18) - 18”



UFA55207(18)BP | Riser Post (12 and 18”) Roof Anchor Base Plate Adapter



UFA30005 | Reusable heavy duty chain roof anchor



UFA30030 | Bull Ring Anchor



UFA30211 | Stand Alone Post for SRL on Standing Trapezoidal Metal Roof Deck; 360° rotation



UFA30201 | Stand Alone Post for SRL on Standing Seam Metal Roof Deck; Seam Widths Ranging from 24” - 36”; 360° rotation



UFA30201S | Steel Swivel Roof Anchor for Self-Retracting Lifeline Used on Standing Seam Metal Roof Deck 16-24”



UFA30070 | Parapet Anchor Clamp with Extended Movable Arm



UFA55370 | Single Seam Roof Anchor



UFA30031 | 4-way Anchor Plate





Model	Description
UFA30061	Deadweight Rooftop Non-penetrating Freestanding Counterweight System
UFA30061(01)SUB1	Set of 8 casted dead weight Upper Plates
UFA30061(02)SUB2	Set of 4 Molded Dead Weight Bottom Plates with Locking Stud and Cotter Pin
UFA30061SUB3	Main Plate and Shock Assembly for the Deadweight Anchor Frame

ANCHORAGES

Door Jamb/Window Anchor

UFA30401 | Door Jamb/Window Anchor, adjustable 23.6" - 49.2"

- KStrong Door Anchor provides a non–intrusive anchor point and can be easily installed inside the interior of a building or window opening enabling the most difficult jobs to get done safely and with confidence.
- KStrong Door Anchor can be installed by just compressing it against the door or window frame, jamming itself between the two vertical sides.
- It is constructed of Aluminum alloy, hence it is highly corrosion resistant and is lightweight, weighing less than 10.7 lbs.
- The arms of the KStrong Door Anchor are adjustable enabling installation on door/window frames of width from 23.62" to 49.21".
- Fast and easy Installation with built in adjustment knob hence no tools or drilling is required.
- Extremely portable design for easy transport, storage and usage. Every Door Anchor is provided with a deluxe carrying bag.

HORIZONTAL LIFELINES (HLL)



60 FT.
ADJUSTABLE
HANDY LINE™
2-PERSON TEMPORARY HORIZONTAL LIFELINE

UFA40110 | KStrong® Handy Line™ 60 ft. Adjustable 2-Person Temporary Horizontal Lifeline System

HORIZONTAL LIFELINES (HLL)

In addition to anchorages, body wear, connectors and devices, KStrong, also provides fall protection solutions for Confined Space Entry, Horizontal Lifeline systems, plus our evolving selection of Dropped Tool Prevention solutions.

Horizontal System

UFA40010 | KStrong® Wrangler™ 100 ft. Adjustable 4-Person Capacity Lightweight Quick Set-up Horizontal Lifeline System. Includes installation carabiner at each end, tension indicator, and two (2) UFA20006 6 ft. anchor straps.

100 FT. ADJUSTABLE WRANGLER™

4-PERSON TEMPORARY HORIZONTAL LIFELINE



Model	Description
UFXR4001	Replacement 100 ft. Replacement Rope Assembly
UFCHLLORING	Replacement Steel O-Ring



UFA40012 | KStrong® Wrangler Jr.™ 60 ft. Adjustable 2-Person Capacity

60 FT. ADJUSTABLE WRANGLER JR.™

2-PERSON TEMPORARY HORIZONTAL LIFELINE



Specialty Anchor

UFA30420 - Off-set I-beam stanchion for approved horizontal lifelines

- Anchor post designed to be installed on metal I-Beam
- Can be used as a stand-alone anchor post or to form a horizontal lifeline along the length of I-Beam
- The post comes with a unique tilted design to allow unobstructed movement of the user during the construction of roofs or metal structure
- Span lengths are adjustable with help of intermediates
- Compatible with I-Beam having flange width of 5.9” (150mm) to 8.66” (220mm)





Specialty Anchor

Vertical Post for Containers

	Model	Description
A	UFA30430	Four Hole Anchor Plate Top
B	UFA30430(SW)	Swivel Anchor Top

• Container anchor post is designed to provide a temporary anchor for working on top of 20 ft. - 40 ft. shipping containers.
• In addition to being used as a stand alone anchor post, it can also be used to form a horizontal lifeline over the top of a container depending upon the requirement of work to be done
• Comes with a side lock and tagline arrangement for easy and secure installation that can be performed by one person
• Four holes on the anchor plate (UFA30430) can be used for making connections as anchor points
• Consists of side handle with special grip for easy carrying and safe transportation
• Can be easily removed without damaging the container

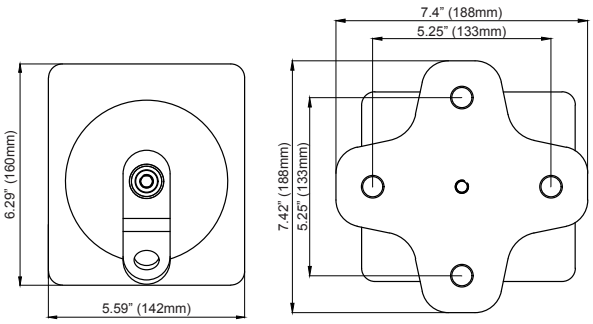

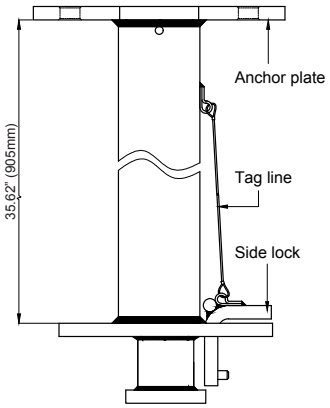





Rescue and Descent - 7 ft. Megapod™ Tripod Kits



	Model	Description
A	UFT510007DK	7 ft. Deluxe Megapod™ Tripod Kit. Includes Tripod, 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket, 60 ft. Material / Personnel Winch, and Storage Bags for Tripod / Equipment.
B	UFT510007RK	7 ft. Megapod™ Tripod Recovery Kit. Includes Tripod, 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket, and Storage Bags for Tripod / Equipment.
C	UFT510007BK	7 ft. Megapod™ Tripod Basic Kit. Includes Tripod, 60 ft. Material / Personnel Winch, and Storage Bags for Tripod / Winch.





Rescue and Descent - 10 ft. Megapod™ Tripod Kits

	Model	Description
D	UFT510010DK	10 ft. Megapod™ Tripod Deluxe Kit. Includes Tripod, 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket, 60 ft. Material / Personnel Winch, and Storage Bags for Tripod / Equipment.
E	UFT510010RK	10 ft. Megapod™ Tripod Recovery Kit. Includes Tripod, 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket, and Storage Bags for Tripod / Equipment.
F	UFT510010BK	10 ft. Megapod™ Tripod Basic Kit. Includes Tripod, 60 ft. Material / Personnel Winch, and Storage Bags for Tripod / Winch.







ADDITIONAL PRODUCTS

Rescue and Descent Megapod™ Tripods & Accessories



	Model	Description
A	UFT510010	10 ft. Megapod™ Adjustable Height Tripod with Dual Built-in Pulley Head Assembly; Includes Tripod Bag
B	UFT510007	7 ft. Megapod™ Adjustable Height Tripod with Dual Built-in Pulley Head Assembly; Includes Tripod Bag
C	UFT530060	60' Galvanized wire cable Personnel/Material rated bi-directional winch
C	UFT530060(SS)	60' Stainless Steel wire cable Personnel/Material rated bi-directional winch
D	UFT531130	100' Galvanized wire cable Personnel/Material rated bi-directional winch
E	UFS310060R	BRUTE™ 60 ft. 3-way SRL-R
F	UFS310090R	BRUTE™ 90 ft. 3-way SRL-R
G	UFT510010B	Mounting Bracket for 3-way SRL
H	UFT510010B2	Universal Lower Assembly Mounting Bracket Receiver for Winch and 3-Way Rescue/Retrieval Device Brackets
J	UFX903010	Spreader Bar with Snap Hooks (ANSI)
K	UFZ810020	10 ft. Megapod™ Storage Bag
L	UFZ810010	7 ft. Megapod™ Storage Bag
M	TRIP-ASS-031	Replacement Leg Pins for Megapod™
N	MPOD-ASS-005	Megapod™ Chain Link Assembly for 7 ft. Tripod
N	MPOD-ASS-008	Megapod™ Chain Link Assembly for 10 ft. Tripod
	UFZ820100	Wide Opening Zippered Bag for 60 ft. or 100 ft. Winch

Rescue and Descent Davits



	Model	Description
M	UFT551080DK	Side Entry Davit Assembly Deluxe Kit with 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket
N	UFT551080	Side Entry Davit Assembly with Retrieval Device Bracket (High Strength Aluminum Alloy)

Rescue and Descent Megadavit™



Rescue and Descent Megadavit™











	Model	Description
A	UFT551011DK	Megadavit™ H-Base Deluxe Kit. Includes H-Base Frame Assembly, 54 in. Column Mast, 3 ft. Cantilever Boom Arm with Winch Bracket, 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket, and 60 ft. Material / Personnel Winch
B	UFT551011BK	Megadavit™ H-Base Basic Kit. Includes H-Base Frame Assembly, 54 in. Column Mast, and 3 ft. Cantilever Boom Arm with Winch Bracket
C	UFT551021DK	Megadavit™ Floor Mount Deluxe Kit. Includes Floor Mount Column Mast Receiver, 54 in. Column Mast, 3 ft. Cantilever Boom Arm with Winch Bracket, 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket, and 60 ft. Material / Personnel Winch
D	UFT551021BK	Megadavit™ Floor Mount Basic Kit. Includes Floor Mount Column Mast Receiver, 54 in. Column Mast, and 3 ft. Cantilever Boom Arm with Winch Bracket
E	UFT551031DK	Megadavit™ Wall Mount Deluxe Kit. Includes Wall Mount Column Mast Receiver, 54 in. Column Mast, 3 ft. Cantilever Boom Arm with Winch Bracket, 60 ft. 3-way Rescue Retrieval SRL-R with Mounting Bracket, and 60 ft. Material / Personnel Winch
F	UFT551031BK	Megadavit™ Wall Mount Basic Kit. Includes Wall Mount Column Mast Receiver, 54 in. Column Mast, and 3 ft. Cantilever Boom Arm with Winch Bracket
G	UFT555001	Megadavit™ H-Base Frame Assembly (High Strength Aluminum Alloy)
H	UFT556201	Megadavit™ 54 in. Column Mast (High Strength Aluminum Alloy)
J	UFT556101	Megadavit™ 36 in. Column Mast (High Strength Aluminum Alloy)
K	UFT556001	Megadavit™ 3 ft. Cantilever Boom Arm with Winch Bracket (High Strength Aluminum Alloy)
L	UFT555101	Megadavit™ Floor Mount Column Mast Receiver (SS316)
M	UFT555201	Megadavit™ Wall Mount Column Mast Receiver (SS316)
N	UFT555002	Megadavit™ Concrete Embed Column Mast Receiver (SS316)
O	UFT557101	Megadavit™ Hitch Mount with Detent Pin



EVAC-R+ Rescue System

UFX209070(150) and UFX209070(300) | EVAC-R+ Rescue System

The KStrong® EVAC-R+ Descender, Rescue and Lifting device is an automatic and controlled descent device designed for the lifting or lowering of an injured person.

- Rescue made possible from high level working platforms that require a simple rescue or evacuation solution
- Hand-wheel for lifting of injured and rescuer simultaneously
- A power drill can be easily utilized with the included 10mm Hexagonal head connector to assist in the rescue allowing the injured person to be raised up to the full length of the kit's rope.
- Controlled descent speed: 1m/sec [187 lbs. (85kg)] and 1.5m/sec. [374 lbs. (170kg)].
- Brake system - Automatic, redundant brake system with 2 fly wheel brakes.
- The maximum load of 628 lbs. (285kg) allows simultaneous descending of up to three persons.
- Alternating descending on both rope ends can be carried out to rescue more than three persons efficiently (shuttle system).
- Can be used with Kernmantle Rope ø 11mm, EN 1891-A (EN 341, EN 1496), ANSI Z359.4:2013 & Kernmantle Rope ø 9,6mm till ø 11mm acc. EN 1891-A (EN 12841)C





	Model	Description
	UFX209070(150)	KStrong® EVAC-R+ Full Rescue Kit with 150 ft. Kernmantle Rope and Hexagon Connector Drill Attachment
	UFX209070(300)	KStrong® EVAC-R+ Full Rescue Kit with 300 ft. Kernmantle Rope and Hexagon Connector Drill Attachment
A	AFX209070	KStrong® EVAC-R+ Descender, Rescue and Lifting Device
B	UFX207001	KStrong® 10 ft. Telescopic Pole for Rescue
C	UFC408451	KStrong® Aluminum Rebar Hook for Use with Telescoping Pole
D	UFX903051	KStrong® Edge Protector with 6 ft. Wire and ANSI Carabiner
E	UFA20006	KStrong® 6 ft. Web Anchor Straps (2 qty)
F	UFC401400	KStrong® Quarter Turn Action ANSI Aluminum Carabiner (2 qty)
G	AFZ177150	KStrong® EVAC-R+ Rescue Kit Bag for up to 295 ft. (90m)
G	AFZ177151	KStrong® EVAC-R+ Rescue Kit Bag for up to 650 ft. (200m)



Carabiners

UFC401100 | Steel Carabiner with .84” gate opening



UFC401110 | Small Steel Carabiner with 1” gate opening



UFC408120 | Steel Carabiner with 2” gate opening



UFC408450 | Large Aluminum Rebar Hook with 2” gate opening



UFC401400 | Aluminum Bulb Type Carabiner with .67” gate opening



UFC401101 | Oval Steel Carabiner with .67” gate opening



UFC404450 | Small aluminum quarter turn locking carabiner with swivel load indicator



UFC404500 | Steel Swivel Snap hook with load indicator



UFC404150 | Stamped Steel Snap Hook



UFC405100 | Tie-back snap hook with 5000 lb. rated gate.



UFC408100 | Large rebar hook, stamped - 2.63” opening




UFC401103 | Forged Steel Triple Locking Carabiner Hook 0.77” Gate Opening



Ladder Climbing System for Fixed Ladders

• Consists of a vertical anchorage line made of stainless steel wire rope installed on a ladder using appropriate mounting brackets.
• Stainless steel rope grab UFG602050 moves along with the user climbing up or down and locks them in case of fall.

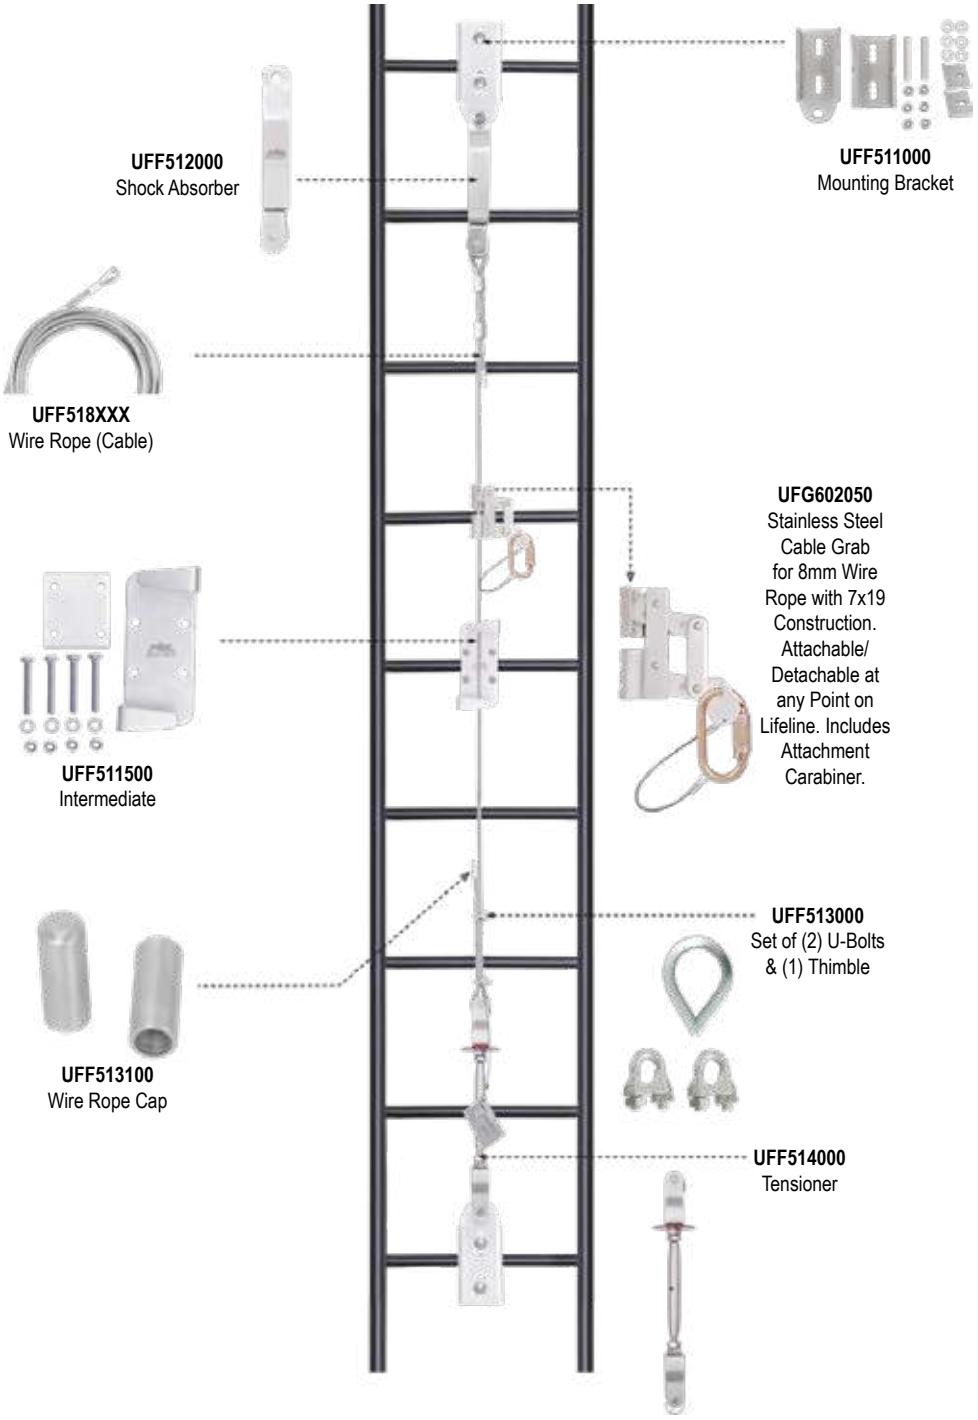



UFF516000
KStrong® Ladder Extension Davit Kit for Fixed Ladders
**(SRL Not Included)*


Model	Length	Model	Length	Model	Length	Model	Length
USCLC020	20 ft.	**USCLC050**	50 ft.	**USCLC080**	80 ft.	**USCLC0130**	130 ft.
USCLC030	30 ft.	**USCLC060**	60 ft.	**USCLC090**	90 ft.	**USCLC0160**	160 ft.
USCLC040	40 ft.	**USCLC070**	70 ft.	**USCLC0100**	100 ft.	**USCLC0200**	200 ft.

Ladder Rescue System

UFZ809030 | 20 ft. Rescue Ladder System

KStrong 20 ft. Rescue Ladder System has been designed for the self-rescue of a conscious user who has had a fall. The ladder kit allows the user to climb to safety with the added benefit of using a backup rope attached to the user which reduces the chance of a secondary fall.

- Rescue ladder kit with 20 ft. ladder and 6 ft. concrete embed strap with loop at both ends
- Equipped with kernmantle rope, rope grab and carabiners
- Simple and easy to deploy Fast Drop System using an existing or a temporary anchor point
- The added rope grab system allows the user to climb efficiently while safely reducing the risk of a secondary fall.
- Optimized for fast and easy rigging
- Only requires one person to operate
- 23 ft. of Rope
- Comes with convenient backpack style bag
- Total kit weight 8.84 lbs.

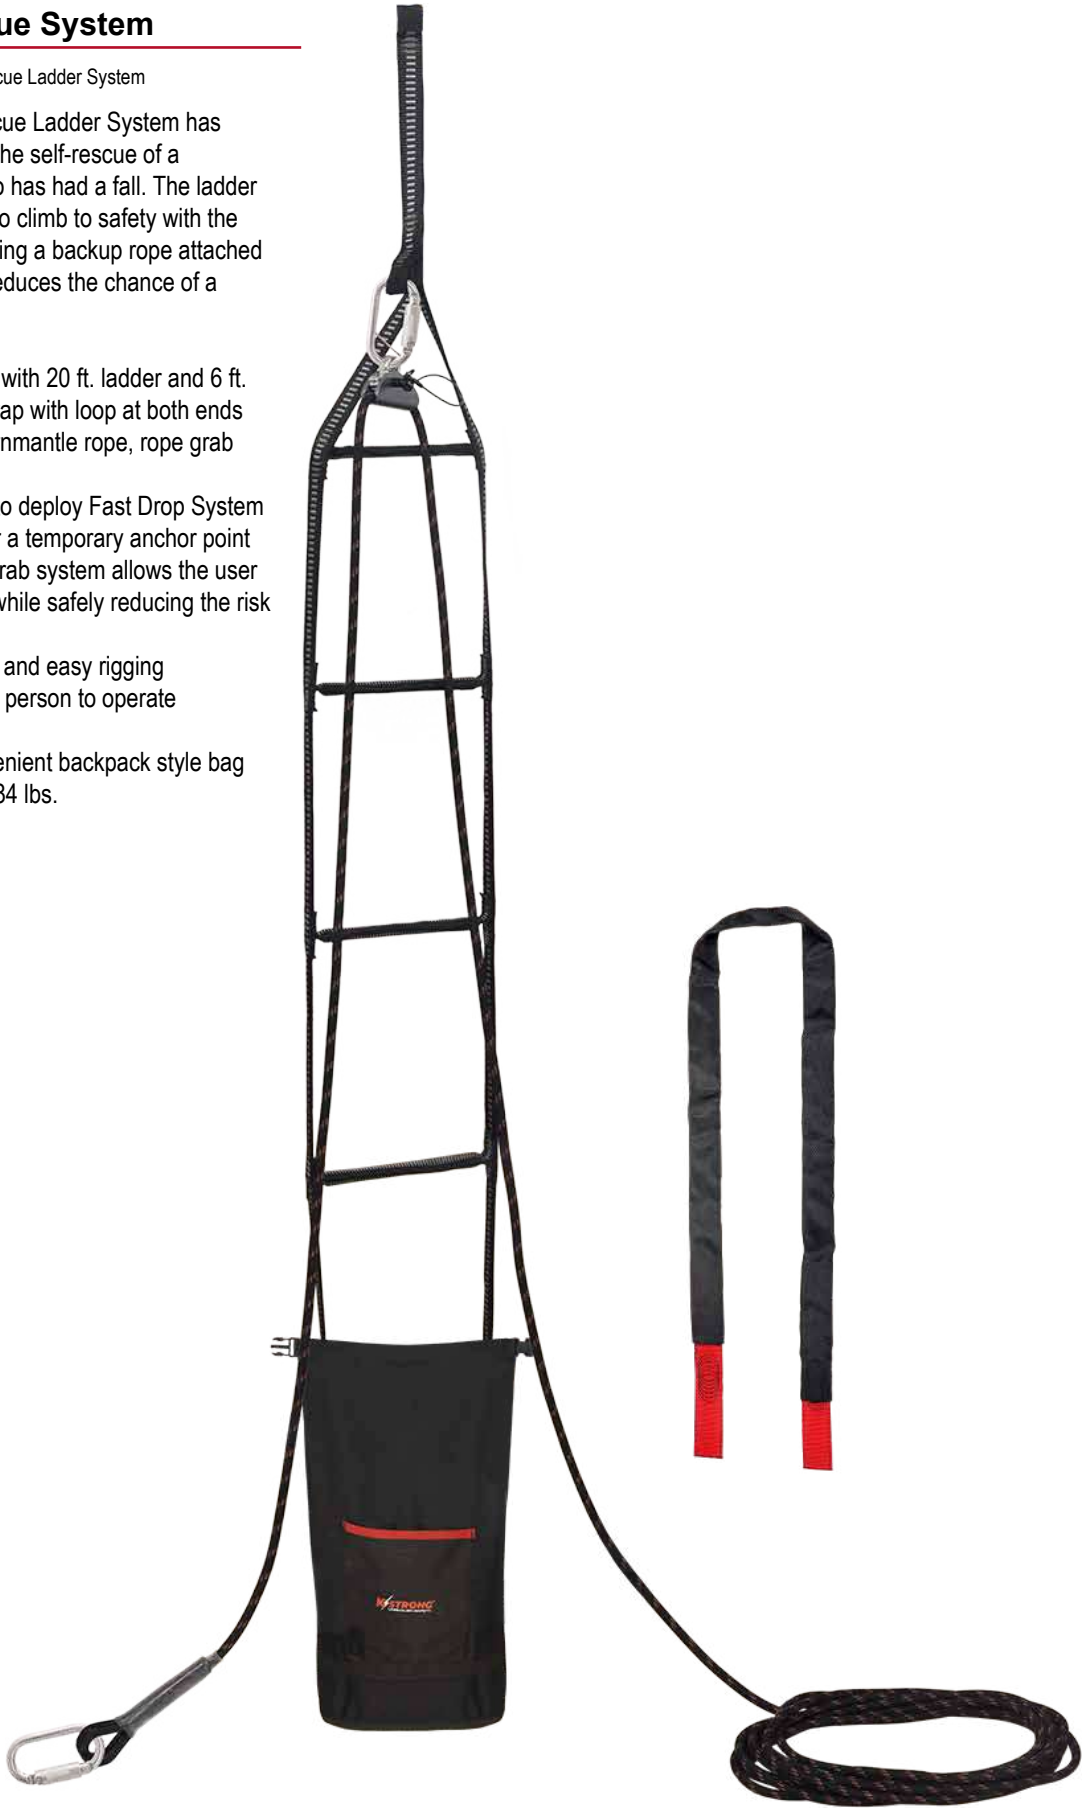


ANATOMY OF FIXED LINE SYSTEMS

HORIZONTAL LIFELINE SYSTEMS

- UFF4000 Wire Rope (Roof Mounted)
- UFF4000 Wire Rope (Wall/Column, Ceiling & Floor Mounted)

VERTICAL LIFELINE SYSTEMS

- UFF7000 Wire Rope (Ladder Mounted)

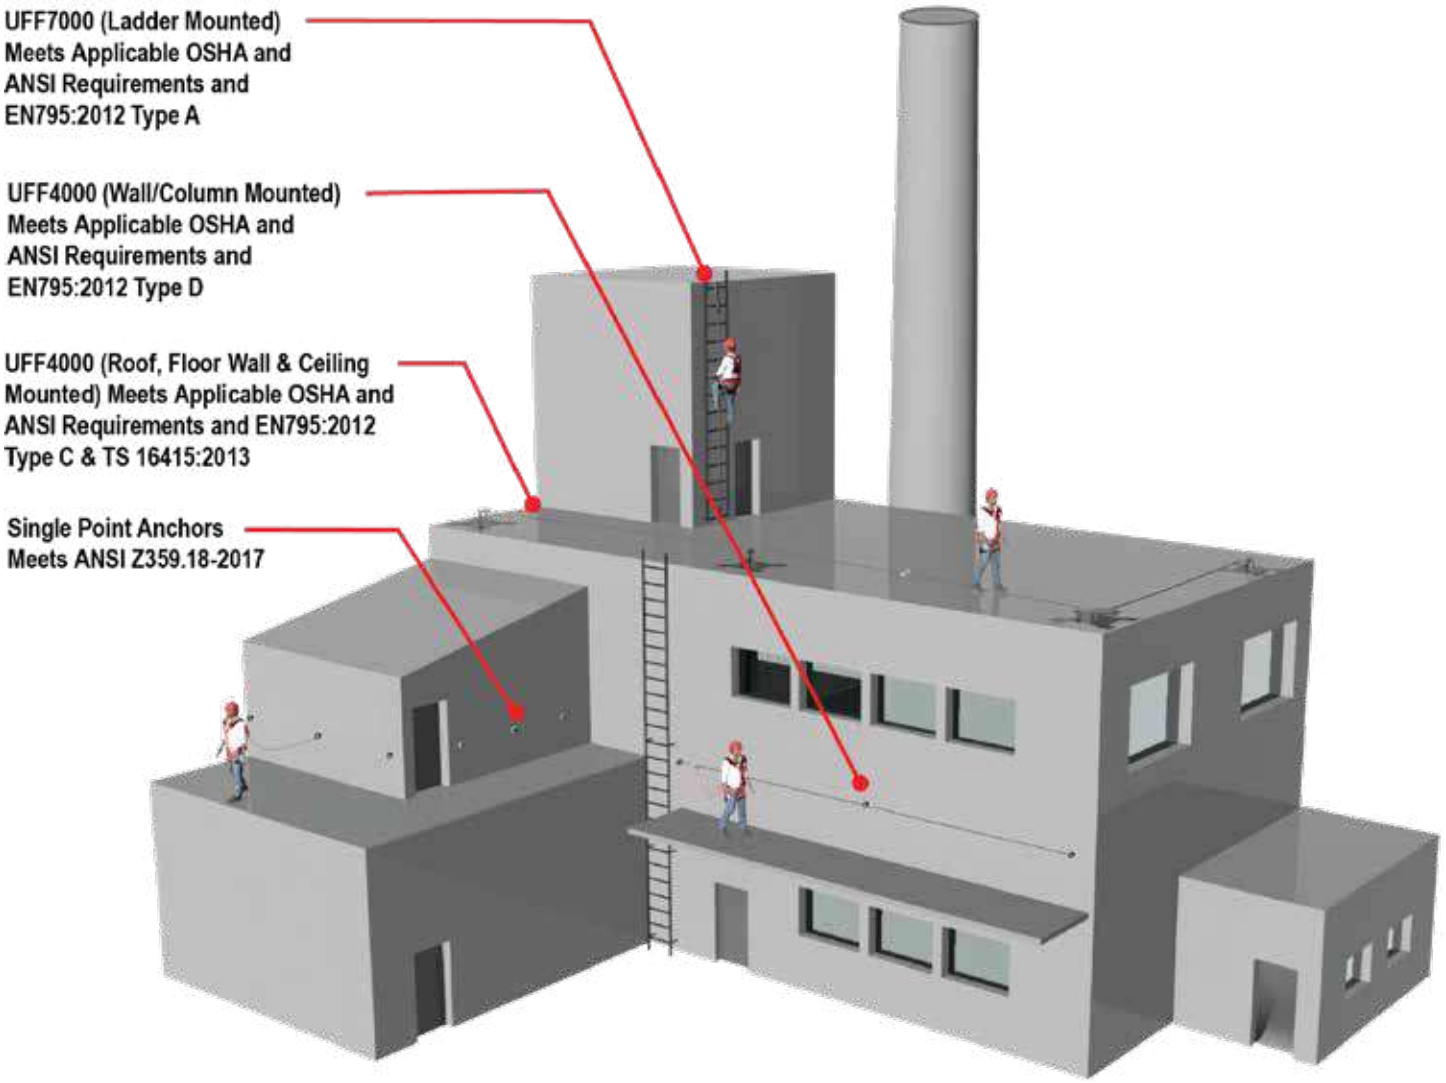

SPECIFICATIONS


IMPACT
—LIFELINE SERIES—

- The IMPACT Cable Line Fall Arrest System meets all applicable OSHA codes and ANSI standards and is certified to EN795:2012 Type A, B, C, and CEN/TS 16415:2013. It is suitable for up to four (4) users simultaneously. It is also being certified by Sira (Certification Number: 11ATEX6276X) for ATEX to comply with use in explosive atmospheres which conforms to Norms EN 13463-1:2009 and EN 13463-5:2003. Shuttle conforms and is certified to EN795:2012 Type B anchor device.
- Flexible anchor line with linear elastic performance properties with a defined elastic coefficient. The impact load generated by a fall arrest event will not exceed 2,248 lbs. (10Kn) as applied to the structure. Energy absorber can absorb up to 5,753ft./lbs. (7800 joules).
- The fall arrest system will be suitable for unrestricted use by up to four users at any one time and any point along the length of the system including between two anchor brackets.
- The rooftop anchor posts are manufactured from 316 stainless steel, 6061 T6 Aluminum, 6005 T5 Aluminum which suitable for metal roof and PEB structures.
- The span distance shall be between 40 ft. (12m) to 50 ft. (15m) between end, corner, and intermediate anchor brackets.
- Wire Rope to be Ø8mm 7 x 19 or 7 x 7 316 stainless steel wire cable with a 7,643 lbf. (34Kn) minimum breaking load.
- The swage termination is manufactured from 316 stainless steel. The swaging is done using a 29,225 lbf. (130kn) hydraulic swaging hand tool and hexlock dies at 6 positions.
- Extremity (End), corner, and intermediate brackets manufactured from 316 stainless steel.
- Labeled according to applicable ANSI and EN 365:2004 General requirements for instruction for use, maintenance, periodic examination, repair, marking, and packaging in accordance with OSHA, ANSI and EN365.
- System Design, application, installation, maintenance, repair, annual inspection, and certification undertaken only by KStrong Registered Installers. Details provided upon request.



CEILING MOUNT APPLICATION

UFF4000 (OVERHEAD/ CEILING MOUNTED)

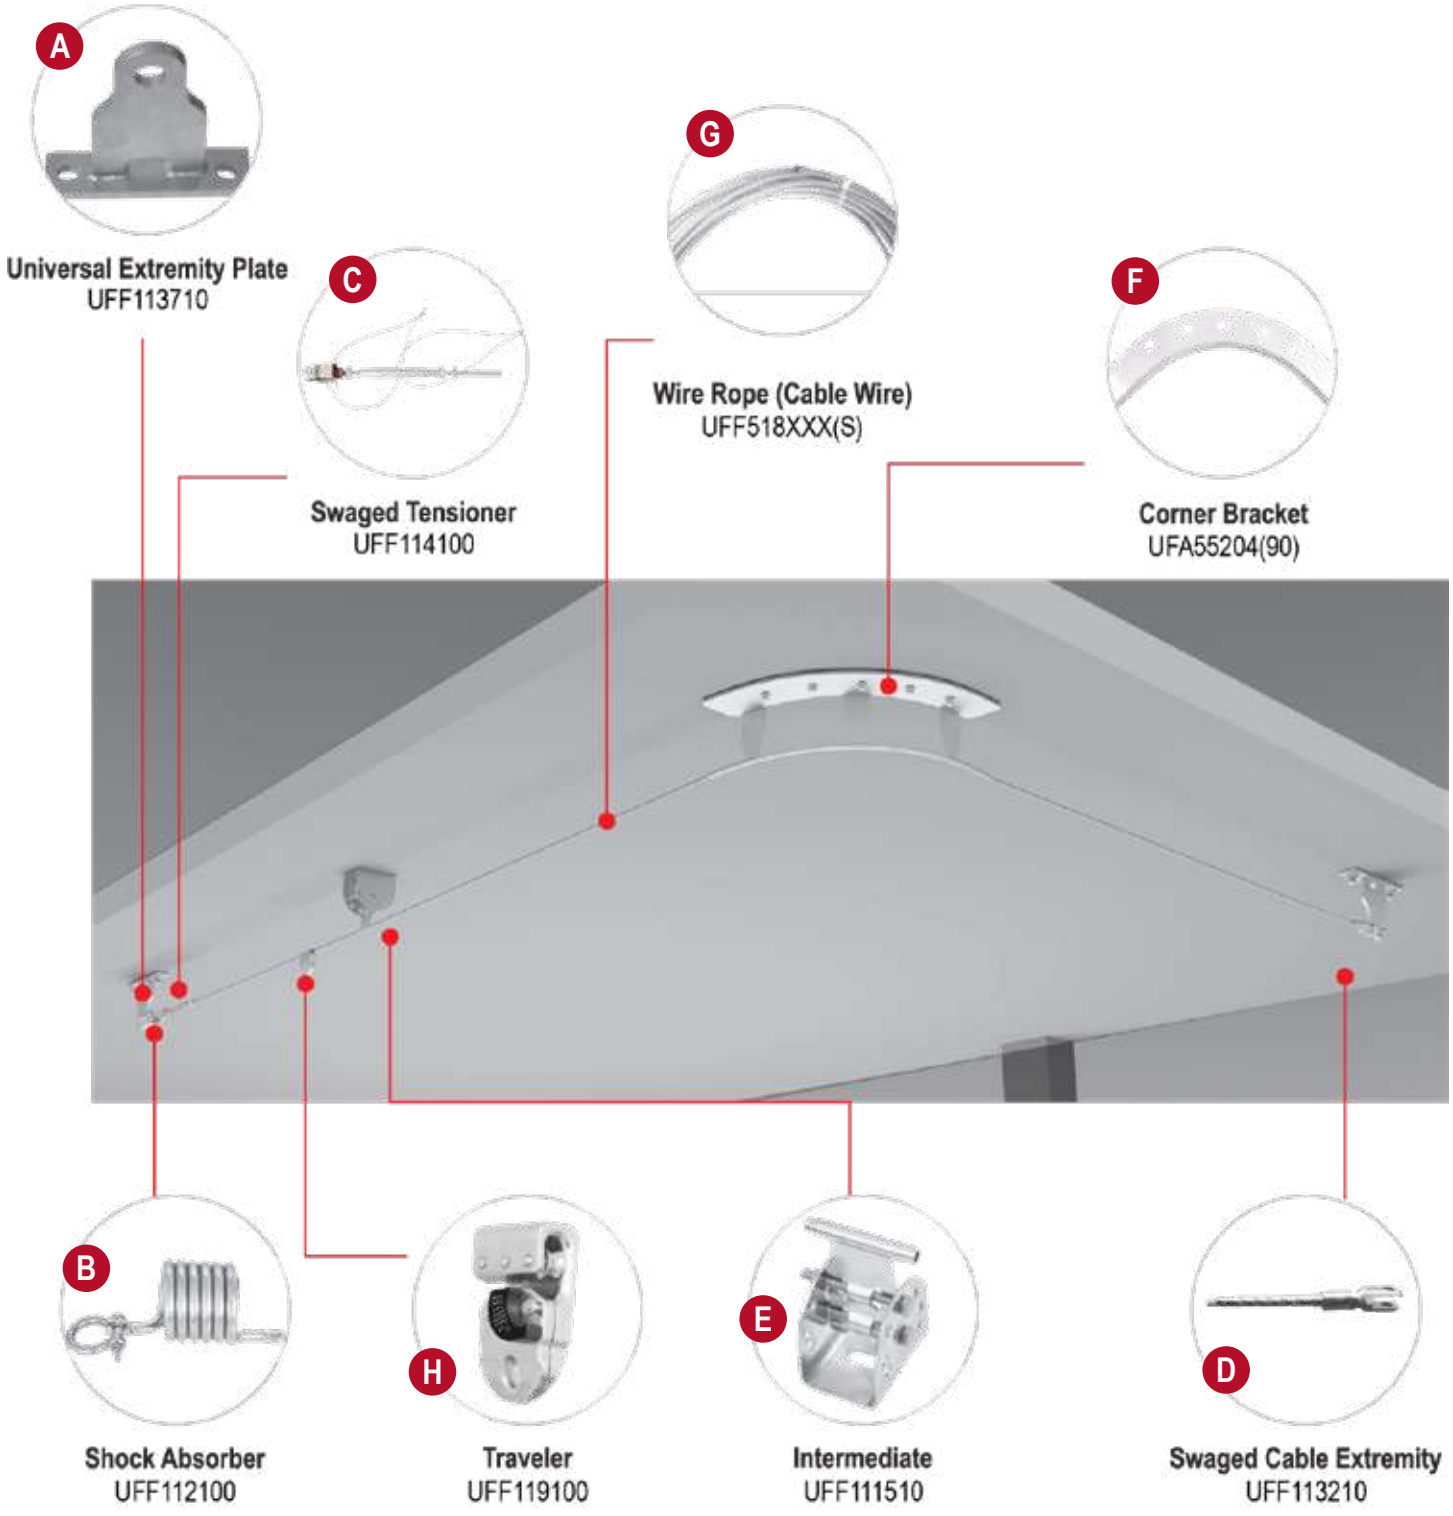


CEILING MOUNT APPLICATION

UFF4000 (OVERHEAD/ CEILING MOUNTED)

	Model	Description
A	UFF113710	KStrong® IMPACT™ Extremity (Start/Stop) Anchor Plate (SS316) with (2) M12 Fasteners (Column / Wall and Overhead / Ceiling Mount HLL Systems)
B	UFF112100	KStrong® IMPACT™ 12K Shock Absorber (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
C	UFF114100	KStrong® IMPACT™ Tensioner with Swaging
D	UFF113210	KStrong® IMPACT™ Swaged Cable Termination
E	UFF111510	KStrong® IMPACT™ Adjustable Intermediate Bracket (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
F	UFA55204(90)	KStrong® IMPACT™ 90° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
	UFA55204(135)	KStrong® IMPACT™ 135° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
G	UFF5187X7XXXS	KStrong® 7x7 Wire Cable (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
	UFF115101	KStrong® IMPACT™ HLL Inspection Plate
	UFF111506	KStrong® IMPACT™ Repair Tube for HLL's Utilizing 8mm 7x19 Wire Cable (Optional)
H	UFF119100	KStrong® IMPACT™ Premium Removable Shuttle with Wheels (Column / Wall and Overhead / Ceiling Mount HLL Systems)(Required for Long Span Systems with Intermediate Anchors)
	UFX206008	KStrong® IMPACT™ Double Tandem Pulley (Column / Wall and Overhead / Ceiling Mount Short Span Systems)(NO Intermediate Anchors)
	UFA55002(SUB1)	KStrong® IMPACT™ Fastener Assembly for Low-Profile Base Plate (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) or Overhead / Ceiling Anchor
	UFA55004(90) (SUB1)	KStrong® IMPACT™ 90° Corner Energy Absorbing Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
	UFA55005(SUB1) (CB)	KStrong® IMPACT™ Variable Bend (15° Max) Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
	UFA55005(SUB1)	KStrong® IMPACT™ Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors

WALL/COLUMN MOUNT APPLICATION

UFF4000 (WALL/COLUMN MOUNTED)

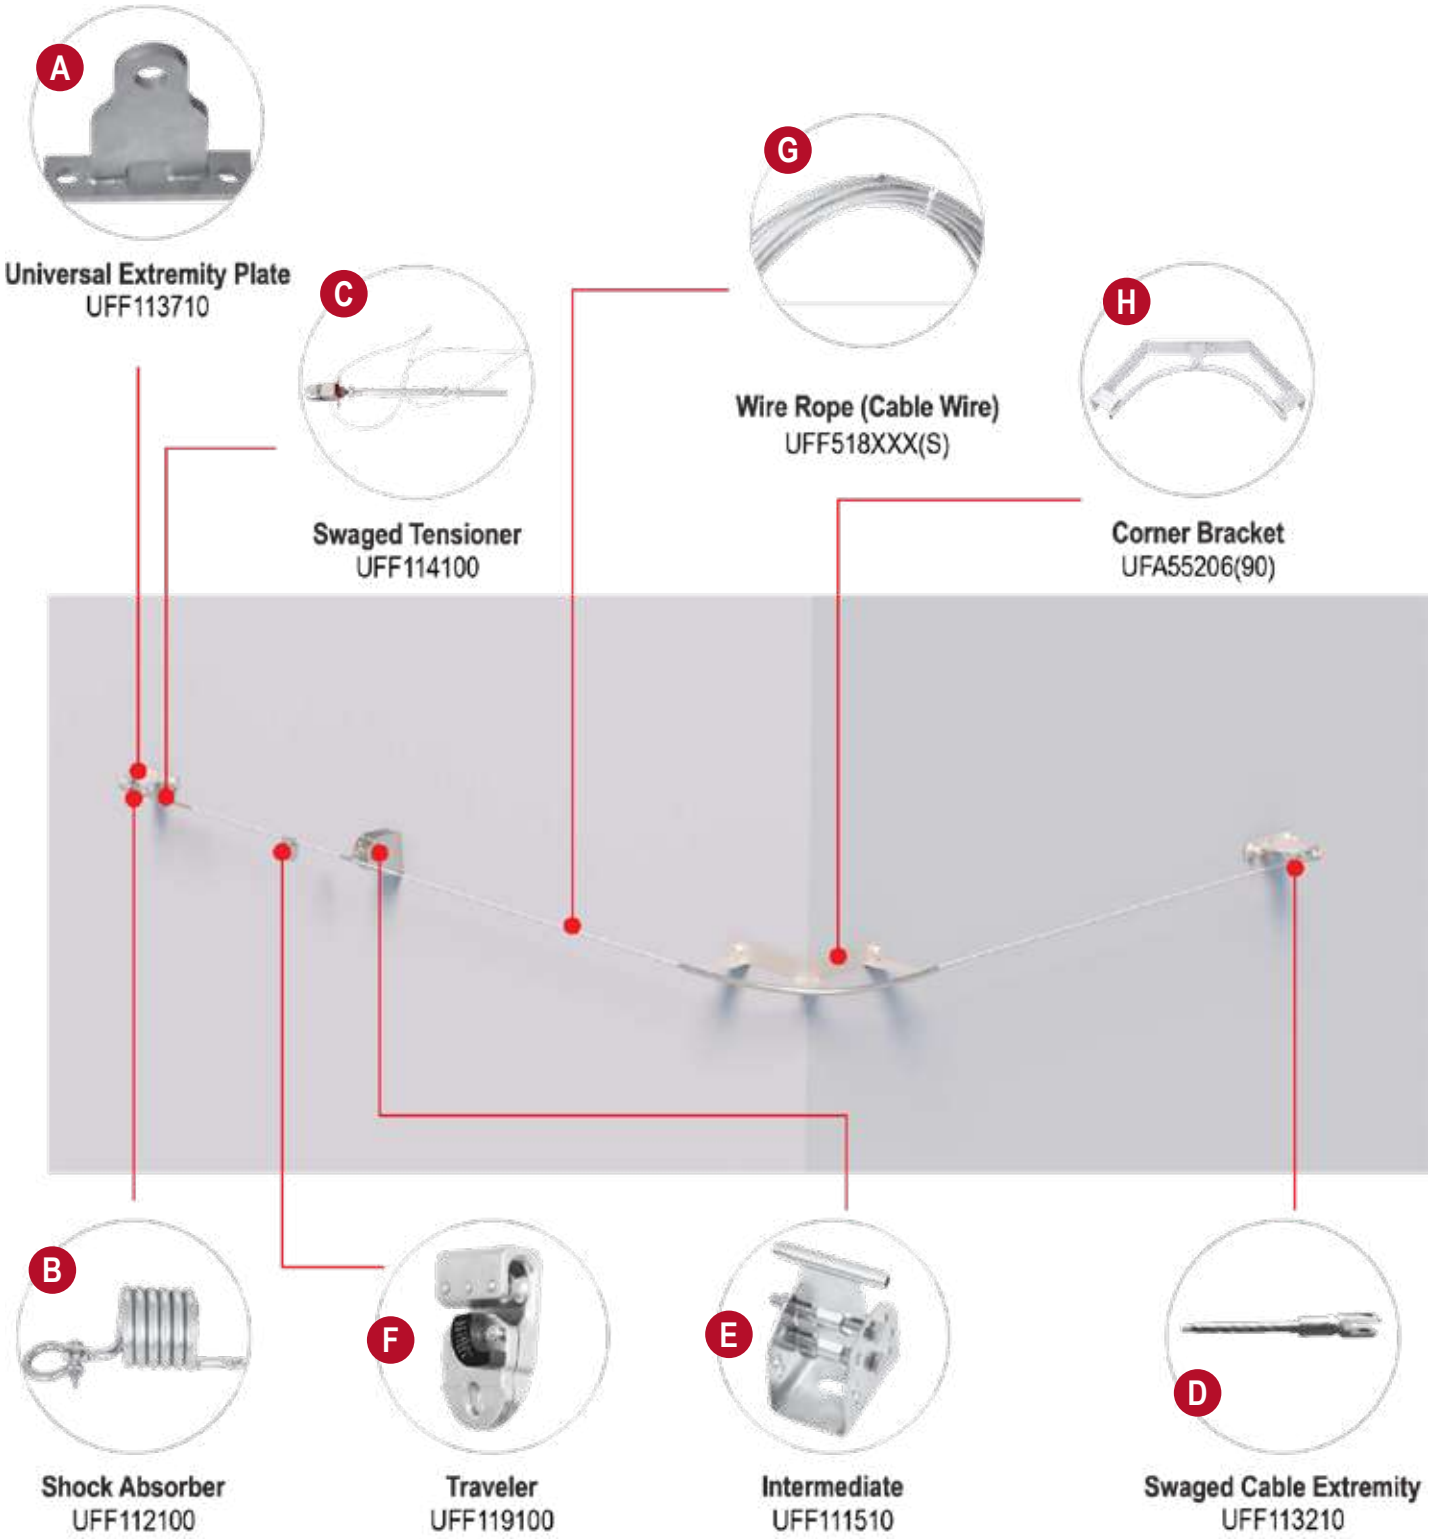


UFF4000 (WALL/COLUMN MOUNTED)

	Model	Description
A	UFF113710	KStrong® IMPACT™ Extremity (Start/Stop) Anchor Plate (SS316) with (2) M12 Fasteners (Column / Wall and Overhead / Ceiling Mount HLL Systems)
B	UFF112100	KStrong® IMPACT™ 12K Shock Absorber (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
C	UFF114100	KStrong® IMPACT™ Tensioner with Swaging
D	UFF113210	KStrong® IMPACT™ Swaged Cable Termination
E	UFF111510	KStrong® IMPACT™ Adjustable Intermediate Bracket (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
F	UFF119100	KStrong® IMPACT™ Premium Removable Shuttle with Wheels (Column / Wall and Overhead / Ceiling Mount HLL Systems)(Required for Long Span Systems with Intermediate Anchors)
	UFF119300	KStrong® IMPACT™ Removable Shuttle (Column / Wall and Roof Mount HLL Systems ONLY)
G	UFF5187X7XXXS	KStrong® 7x7 Wire Cable (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
	UFF115101	KStrong® IMPACT™ HLL Inspection Plate
	UFF111506	KStrong® IMPACT™ Repair Tube for HLL's Utilizing 8mm 7x19 Wire Cable (Optional)
	UFA55205(90)	KStrong® IMPACT™ 90° Intermediate Internal Corner Bracket (Column / Wall Mount HLL Systems)
H	UFA55206(90)	KStrong® IMPACT™ 90° Intermediate External Corner Bracket (Column / Wall Mount HLL Systems)
	UFX206008	KStrong® IMPACT™ Double Tandem Pulley (Column / Wall and Overhead / Ceiling Mount Short Span Systems)(NO Intermediate Anchors)

ROOF/FLOOR MOUNT APPLICATION
IMPACT COMPONENTS

STANDING SEAM ROOF DECK (LOW PROFILE)

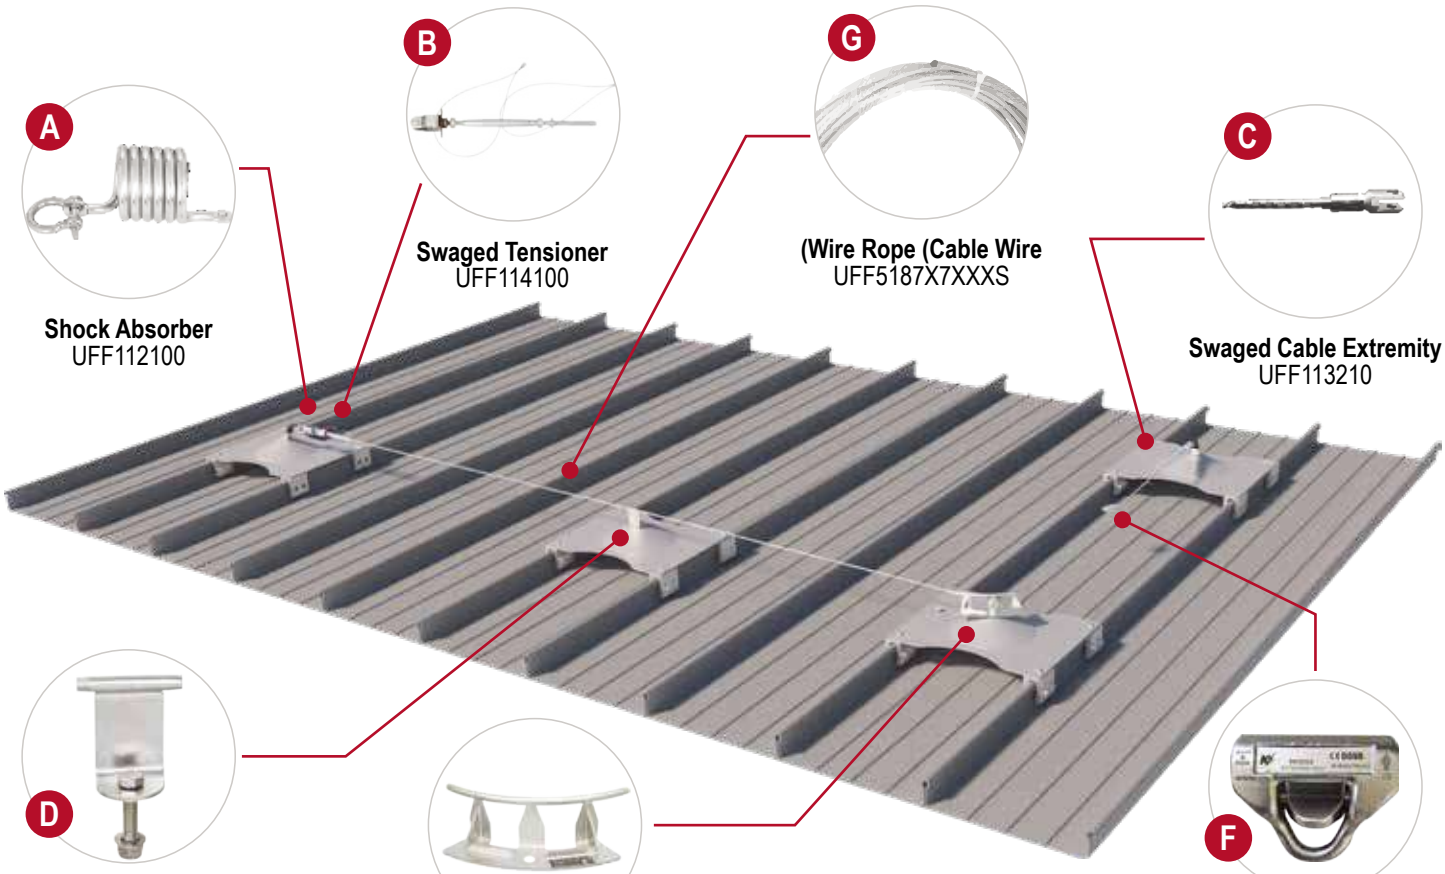

IMPACT
LIFELINE SERIES

STANDING SEAM ROOF DECK (LOW PROFILE)

	Model	Description
A	UFF112100	KStrong® IMPACT™ 12K Shock Absorber (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
B	UFF114100	KStrong® IMPACT™ Tensioner with Swaging
C	UFF113210	KStrong® IMPACT™ Swaged Cable Termination
	UFA55006(SUB1)	KStrong® IMPACT™ Extremity (Start/Stop) Energy Absorbing Bracket for all Roof Mount HLL Systems / Single Point Anchors
D	UFF111510	KStrong® IMPACT™ Adjustable Intermediate Bracket (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
D	UFA55005(SUB1)	KStrong® IMPACT™ Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks)
D	UFA55311S24	KStrong® IMPACT™ Low Profile Intermediate Anchor Post Assembly for Standing Seam Roof Deck (Standing Seam Widths up to 24")
D	UFA55311S39	KStrong® IMPACT™ Low Profile Intermediate Anchor Post Assembly for Standing Seam Roof Deck (Standing Seam Widths up to 39")
E	UFA55204(90)	KStrong® IMPACT™ 90° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
E	UFA55204(135)	KStrong® IMPACT™ 135° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
E	UFA55004(90)(SUB1)	KStrong® IMPACT™ 90° Corner Energy Absorbing Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
E	UFA55005(SUB1)(CB)	KStrong® IMPACT™ Variable Bend (15° Max) Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
E	UFA55411S24	KStrong® IMPACT™ Low Profile Variable Bend (15° Max) Anchor Post Assembly for Standing Seam Roof Deck (Standing Seam Widths up to 24")
E	UFA55411S39	KStrong® IMPACT™ Low Profile Variable Bend (15° Max) Anchor Post Assembly for Standing Seam Roof Deck (Standing Seam Widths up to 39")
E	UFA55209(90)S24	KStrong® IMPACT™ Low Profile 90° Corner Anchor Post Assembly for Standing Seam Roof Deck (Standing Seam Widths up to 24")
E	UFA55209(90)S39	KStrong® IMPACT™ Low Profile 90° Corner Anchor Post Assembly for Standing Seam Roof Deck (Standing Seam Widths up to 39")
F	UFF119300	KStrong® IMPACT™ Removable Shuttle (Column / Wall and Roof Mount HLL Systems ONLY)
G	UFF5187X7XXXS	KStrong® 7x7 Wire Cable (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
	UFA55111S24	KStrong® IMPACT™ Low Profile Extremity (Start/Stop) Energy Absorbing Anchor Post Assembly for Standing Seam Roof Deck (Standing Seam Widths up to 24")
	UFA55111S39	KStrong® IMPACT™ Low Profile Extremity (Start/Stop) Energy Absorbing Anchor Post Assembly for Standing Seam Roof Deck (Standing Seam Widths up to 39")
	UFF115101	KStrong® IMPACT™ HLL Inspection Plate
	UFF111506	KStrong® IMPACT™ Repair Tube for HLL's Utilizing 8mm 7x19 Wire Cable (Optional)
	UFA55002(SUB1)	KStrong® IMPACT™ Fastener Assembly for Low-Profile Base Plate (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) or Overhead / Ceiling Anchor
	UFA55001	KStrong® IMPACT™ Low-Profile Base Plate for Standing Seam or Concrete Roof Decks
	UFA55003(SUB1)	KStrong® IMPACT™ Extension Rail Set with Fasteners for Low Profile Standing Seam Base Plate (Standing Seam Widths up to 39")
	UFA55003(SUB2)	KStrong® IMPACT™ Extension Rail Set with Fasteners for Low Profile Standing Seam Base Plate (Standing Seam Widths up to 24")
	UFFS5TX	S-5! Clamp (Type X being either A, B, C, D, E, F, G, or H style)*


S-5!®
The Right Way


LMCURBS
Est. 1966

Founded by a veteran metal roof expert, S-5! has been the leading authority on metal roof attachment solutions since 1992. S-5!'s zero-penetration clamps and lifetime brackets attach ancillary items to standing seam and exposed-fastened metal roofs respectively, while maintaining roof integrity and warranties. For more information, visit www.S-5.com.

800-284-1412 / lmcurbs.com


BUILT-UP / MEMBRANE TPO ROOF DECK (LOW PROFILE)

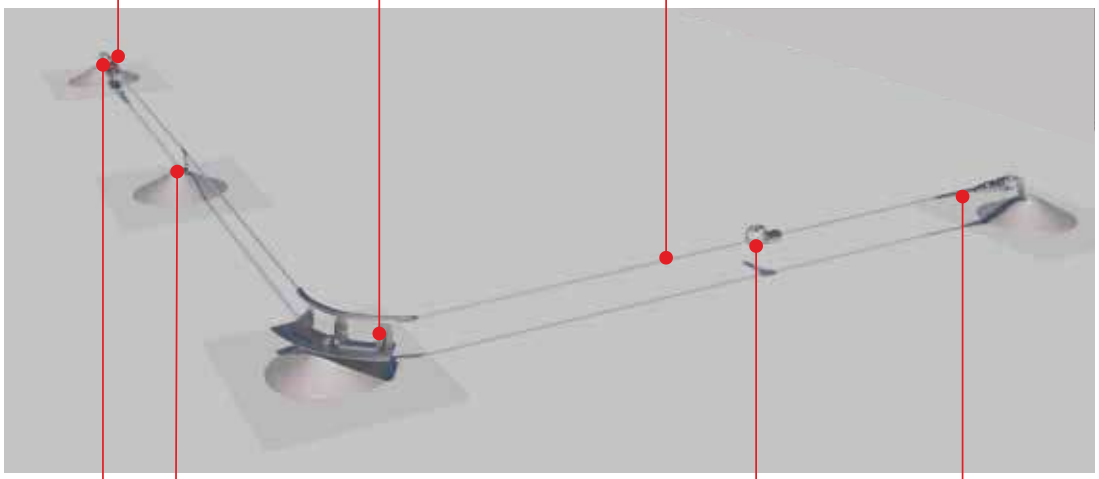

B 
Swaged Tensioner
UFF114100


D 
Corner Bracket
UFA55204


F 
Wire Rope (Cable Wire)
UFF518XXX(S)

A 
Shock Absorber
UFF112100


G 
Intermediate
UFA55005(SUB1)

E 
Carriage Body
UFF119300


C 
Swaged Cable Extremity
UFF113210

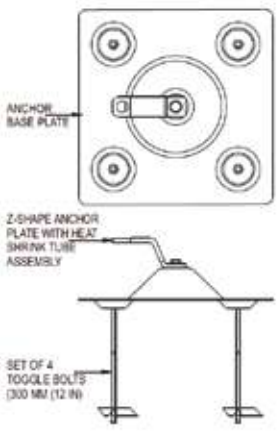


ANCHOR POST (EXTREMITY) WITH SET OF 4 NOS TOGGLE ANCHOR
H (18/UFA55111TG12

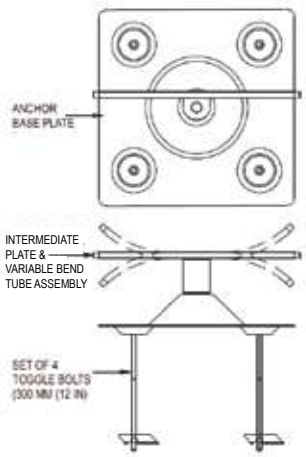

ANCHOR POST (INTERMEDIATE) WITH SET OF 4 NOS TOGGLE ANCHOR
L (18/UFA55411TG12

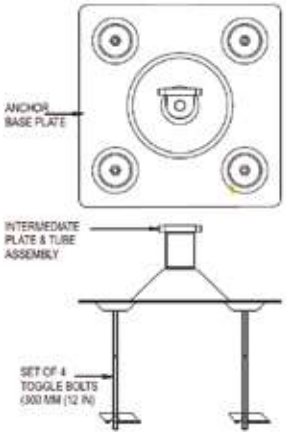

ANCHOR POST (INTERMEDIATE) WITH SET OF 4 NOS TOGGLE ANCHOR
K (18/UFA55311TG12

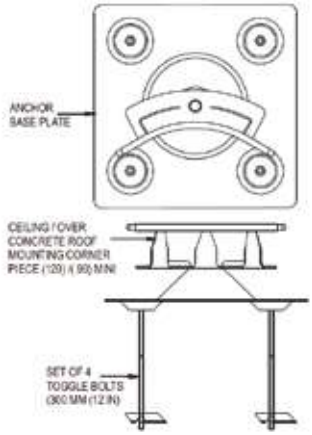

ANCHOR POST (CORNER) WITH SET OF 4 NOS TOGGLE ANCHOR
J UFA55209(90)TG12/18


BUILT-UP / MEMBRANE TPO ROOF DECK (LOW PROFILE)


	Model	Description
A	UFF112100	KStrong® IMPACT™ 12K Shock Absorber (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
B	UFF114100	KStrong® IMPACT™ Tensioner with Swaging
C	UFF113210	KStrong® IMPACT™ Swaged Cable Termination
	UFF111510	KStrong® IMPACT™ Adjustable Intermediate Bracket (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
D	UFA55204(90)	KStrong® IMPACT™ 90° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
D	UFA55204(135)	KStrong® IMPACT™ 135° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
E	UFF119300	KStrong® IMPACT™ Removable Shuttle (Column / Wall and Roof Mount HLL Systems ONLY)
F	UFF5187X7XXXS	KStrong® 7x7 Wire Cable (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
	UFF115101	KStrong® IMPACT™ HLL Inspection Plate
	UFF111506	KStrong® IMPACT™ Repair Tube for HLL's Utilizing 8mm 7x19 Wire Cable (Optional)
	UFA55006(SUB1)	KStrong® IMPACT™ Extremity (Start/Stop) Energy Absorbing Bracket for all Roof Mount HLL Systems / Single Point Anchors
	UFA55002(SUB1)	KStrong® IMPACT™ Fastener Assembly for Low-Profile Base Plate (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) or Overhead / Ceiling Anchor
	UFA55004(90)(SUB1)	KStrong® IMPACT™ 90° Corner Energy Absorbing Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
	UFA55005(SUB1)(CB)	KStrong® IMPACT™ Variable Bend (15° Max) Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
G	UFA55005(SUB1)	KStrong® IMPACT™ Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks)
	UFA55001(TG)	KStrong® IMPACT™ Low-Profile Base Plate for Built-Up / Membrane TPO Roof Decks
	UFA55312(SUB1)(12")	Set of 4 Toggle Bolts 12" (300mm)
	UFA55312(SUB2)(18")	Set of 4 Toggle Bolts 18" (450mm)
H	UFA55111TG12	KStrong® IMPACT™ Low Profile Extremity (Start/Stop) Energy Absorbing Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 12" Toggle Bolts
H	UFA55111TG18	KStrong® IMPACT™ Low Profile Extremity (Start/Stop) Energy Absorbing Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 18" Toggle Bolts
J	UFA55209(90)TG12	KStrong® IMPACT™ Low Profile 90° Corner Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 12" Toggle Bolts
J	UFA55209(90)TG18	KStrong® IMPACT™ Low Profile 90° Corner Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 18" Toggle Bolts
K	UFA55311TG12	KStrong® IMPACT™ Low Profile Intermediate Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 12" Toggle Bolts
K	UFA55311TG18	KStrong® IMPACT™ Low Profile Intermediate Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 18" Toggle Bolts
L	UFA55411TG12	KStrong® IMPACT™ Low Profile Variable Bend (15° Max) Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 12" Toggle Bolts
L	UFA55411TG18	KStrong® IMPACT™ Low Profile Variable Bend (15° Max) Anchor Post Assembly for Built-Up / Membrane TPO Roof Deck with 18" Toggle Bolts

ROOF/FLOOR MOUNT APPLICATION
IMPACT COMPONENTS

IMPACT — LIFELINE SERIES

CONCRETE ROOF DECK

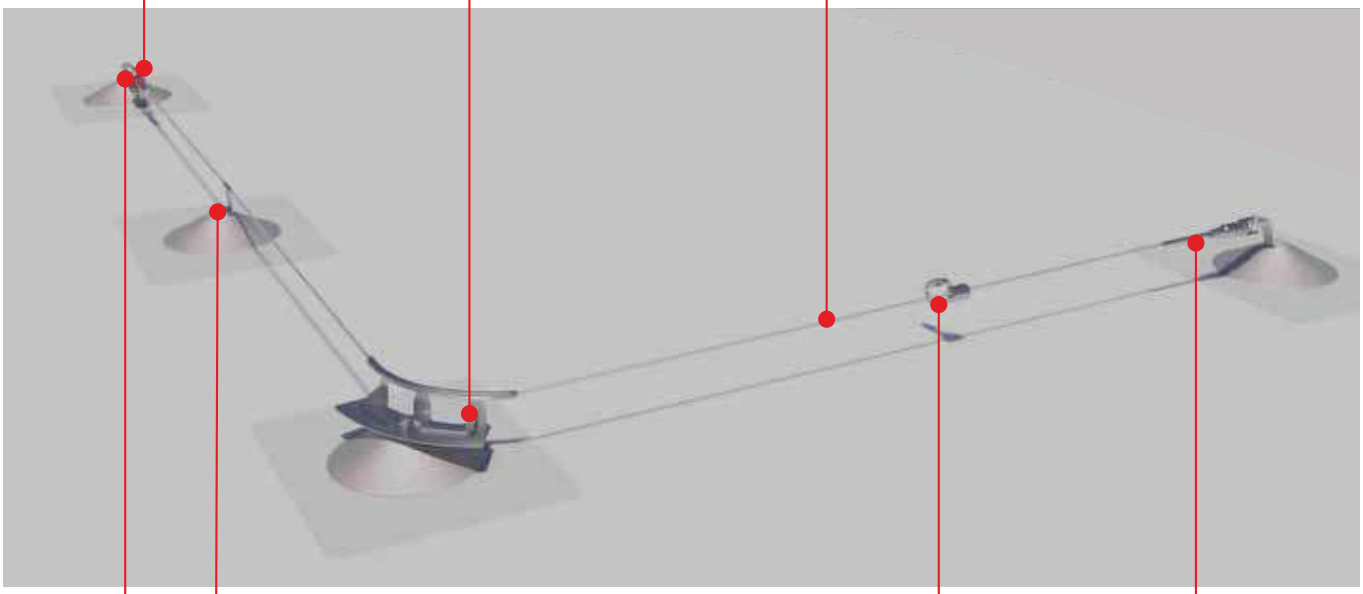

B 


Swaged Tensioner
UFF114100

D 

Corner Bracket
UFA55204

F 

Wire Rope (Cable Wire)
UFF518XXX(S)

A 


Shock Absorber
UFF112100

G 

Intermediate
UFA55005(SUB1)

E 

Carriage Body
UFF119300


C 

Swaged Cable Extremity
UFF113210

ROOF/FLOOR MOUNT APPLICATION
IMPACT COMPONENTS

IMPACT — LIFELINE SERIES

CONCRETE ROOF DECK



End Anchor Assembly
(2 per system)
UFA55111C



90° Corner Bracket Assembly
(3 max. per system)
UFA55209(90)C



Intermediate Anchor Assembly
(39 ft. max. between intermediates)
UFA55311C



	Model	Description
A	UFF112100	KStrong® IMPACT™ 12K Shock Absorber (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
B	UFF114100	KStrong® IMPACT™ Tensioner with Swaging
C	UFF113210	KStrong® IMPACT™ Swaged Cable Termination
	UFF111510	KStrong® IMPACT™ Adjustable Intermediate Bracket (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
D	UFA55204(90)	KStrong® IMPACT™ 90° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
D	UFA55204(135)	KStrong® IMPACT™ 135° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
E	UFF119300	KStrong® IMPACT™ Removable Shuttle (Column / Wall and Roof Mount HLL Systems ONLY)
F	UFF5187X7XXXS	KStrong® 7x7 Wire Cable (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
	UFF115101	KStrong® IMPACT™ HLL Inspection Plate
	UFF111506	KStrong® IMPACT™ Repair Tube for HLL's Utilizing 8mm 7x19 Wire Cable (Optional)
	UFA55006(SUB1)	KStrong® IMPACT™ Extremity (Start/Stop) Energy Absorbing Bracket for all Roof Mount HLL Systems / Single Point Anchors
	UFA55002(SUB1)	KStrong® IMPACT™ Fastener Assembly for Low-Profile Base Plate (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) or Overhead / Ceiling Anchor
	UFA55004(90)(SUB1)	KStrong® IMPACT™ 90° Corner Energy Absorbing Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
	UFA55005(SUB1)(CB)	KStrong® IMPACT™ Variable Bend (15° Max) Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
G	UFA55005(SUB1)	KStrong® IMPACT™ Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks)
	UFA55001	KStrong® IMPACT™ Low-Profile Base Plate for Standing Seam or Concrete Roof Decks
H	UFA55111C	KStrong® IMPACT™ Low Profile Extremity (Start/Stop) Energy Absorbing Anchor Post Assembly for Concrete Roof Deck
J	UFA55209(90)C	KStrong® IMPACT™ Low Profile 90° Corner Anchor Post Assembly for Concrete Roof Deck
K	UFA55311C	KStrong® IMPACT™ Low Profile Intermediate Anchor Post Assembly for Concrete Roof Deck
	UFA55411C	KStrong® IMPACT™ Low Profile Variable Bend (15° Max) Anchor Post Assembly for Concrete Roof Deck


FEATURES

- Certified for up to 4 users
- Manufactured from 6061 T6 Aluminum and 316 Stainless Steel
- Suitable for Standing Seam, R-Panel, Built-Up Membrane and Concrete roof profiles
- 8mm wire cable thickness (grade 316)
- Suitable for both fall arrest and fall restraint
- Built-in shock absorber with tension indicator
- Passed system operating temperatures between -40°C to +60°C
- Uses water proof rivets and self drilling screws o attach the system base plates to the roof deck. Depending on the roof deck profile, the use of toggle bolts may be used.



ROOF/FLOOR MOUNT APPLICATION
IMPACT COMPONENTS

METAL PANEL / R-PANEL ROOF DECK (LOW PROFILE)

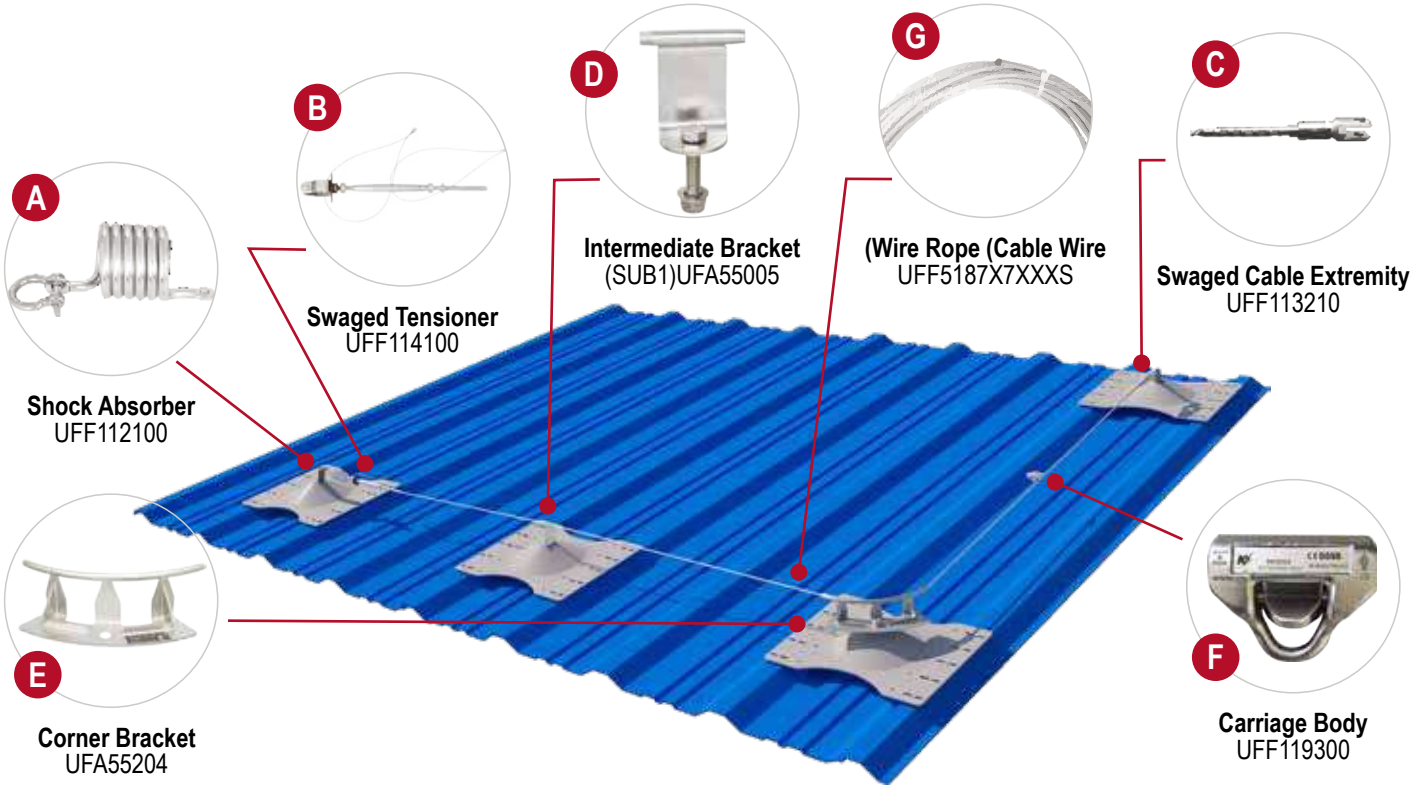

	Model	Description
A	UFF112100	KStrong® IMPACT™ 12K Shock Absorber (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
B	UFF114100	KStrong® IMPACT™ Tensioner with Swaging
C	UFF113210	KStrong® IMPACT™ Swaged Cable Termination
D	UFF111510	KStrong® IMPACT™ Adjustable Intermediate Bracket (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
D	UFA55005(SUB1)	KStrong® IMPACT™ Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks)
D	UFA55311	KStrong® IMPACT™ Low Profile Intermediate Anchor Post Assembly for Metal Panel / R-Panel Roof Deck
E	UFA55204(90)	KStrong® IMPACT™ 90° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
E	UFA55204(135)	KStrong® IMPACT™ 135° Intermediate Corner Bracket (Overhead / Ceiling and Roof Mount HLL Systems)
E	UFA55004(90)(SUB1)	KStrong® IMPACT™ 90° Corner Energy Absorbing Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
E	UFA55005(SUB1)(CB)	KStrong® IMPACT™ Variable Bend (15° Max) Intermediate Bracket for Use with all Low-Profile Base Plates (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) and Overhead / Ceiling Anchors
E	UFA55209(90)	KStrong® IMPACT™ Low Profile 90° Corner Anchor Post Assembly for Metal Panel / R-Panel Roof Deck
E	UFA55411	KStrong® IMPACT™ Low Profile Variable Bend (15° Max) Anchor Post Assembly for Metal Panel / R-Panel Roof Deck
F	UFF119300	KStrong® IMPACT™ Removable Shuttle (Column / Wall and Roof Mount HLL Systems ONLY)
G	UFF5187X7XXXS	KStrong® 7x7 Wire Cable (Column / Wall, Overhead / Ceiling, and Roof Mount HLL Systems)
	UFA55006(SUB1)	KStrong® IMPACT™ Extremity (Start/Stop) Energy Absorbing Bracket for all Roof Mount HLL Systems / Single Point Anchors
	UFA55111	KStrong® IMPACT™ Low Profile Extremity (Start/Stop) Energy Absorbing Anchor Post Assembly for Metal Panel / R-Panel Roof Deck
	UFF115101	KStrong® IMPACT™ HLL Inspection Plate
	UFF111506	KStrong® IMPACT™ Repair Tube for HLL's Utilizing 8mm 7x19 Wire Cable (Optional)
	UFA55002(SUB1)	KStrong® IMPACT™ Fastener Assembly for Low-Profile Base Plate (Standing Seam, Metal Panel / R-Panel, Built-Up TPO, and Concrete Roof Decks) or Overhead / Ceiling Anchor
	UFFBULBRIV	KStrong® IMPACT™ Set of 8 quantity pop rivets for attachment of Base Plate for Metal Panel / R-Panel Roof Deck
	UFA55001(SUB1)	KStrong® IMPACT™ Low-Profile Base Plate for Metal Panel / R-Panel Roof Deck

WARRANTY & SERVICES

- All systems come with a warranty period of 12 months.
- All systems are thus further warrantied with 20 years provided they are inspected once annually according to the requirements of OSHA, ANSI and EN365.
- Competent Person Training on the Inspection, Use and Maintenance of any system will be provided along with Competent Person Certificate.
- Competent Person training on how to conduct periodic inspection will be provided.



RECOMMENDED PPE

While working on a roof the user can select from a range of Strong fall protection PPE to work safely with either Lanyards, Rope lines or SRLs in conjunction with a Full Body Harness.



Energy Absorbing Lanyard
UFL201101



6 ft. Micron™ SRL UFS351102



Manual 3 ft. Shock Absorbing Rope Grab Assembly | UFG611020



White Polydac Rope
UFR200025 | 25 ft.
UFR200050 | 50 ft.



Full Body Roofers Harness
UFH10201G

GUARDRAIL

KStrong K-Rail™ non-penetrating weighted guardrail systems are designed to provide fall protection for those working at elevation or around floor openings. Unlike active fall protection components and systems such as full body harnesses and self-retracting lifelines, properly installed K-Rail guardrails do not require worker training in order for the workers to be protected. Because the K-Rail™ Guardrail system is non-penetrating, the threat of any permanent deformation to a roof deck is mitigated. Every jobsite has its own potential fall hazards. Our engineering department is available to help you quantify how much K-Rail™ Guardrail is required for any application. Please contact systems@kstrong.com for more information.

K-Rail™ Guardrail Systems

A




6 ft. Wide x 42 in. Tall

D



E


TOP VIEW



BOTTOM VIEW
Anti-Skid Tape
for Better Surface
Grip



B

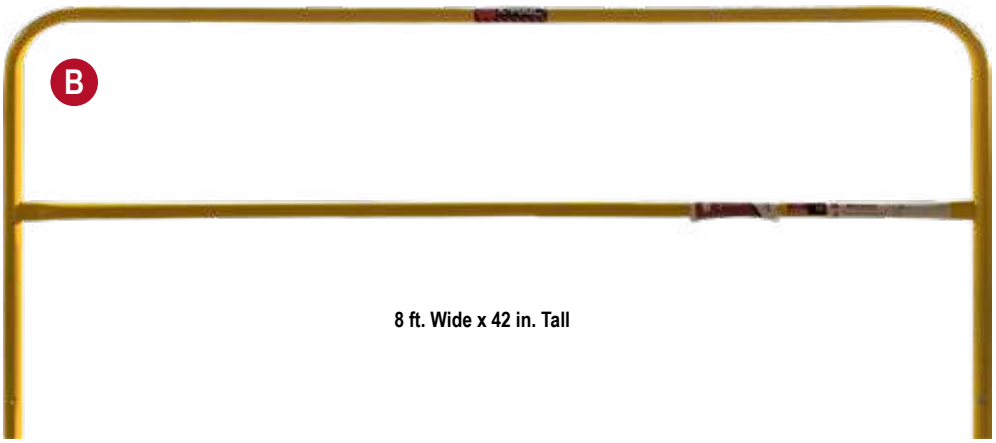


8 ft. Wide x 42 in. Tall

F



C

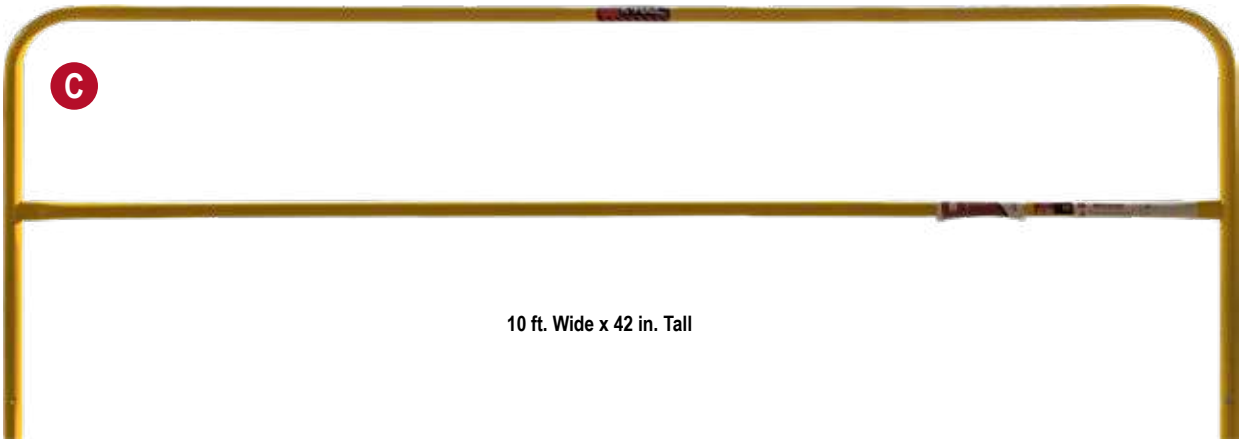


10 ft. Wide x 42 in. Tall

GUARDRAIL



	Model	Description
A	**UFGR140006**	KStrong® Guardrail 6 ft. with Powder Coated Steel
B	**UFGR140008**	KStrong® Guardrail 8 ft. with Powder Coated Steel
C	**UFGR140010**	KStrong® Guardrail 10 ft. with Powder Coated Steel
D	**UFGR240002**	KStrong® Guardrail 2-way Multidirectional Baseplate
E	**UFGR240004**	KStrong® Guardrail 4-way Baseplate with Powder Coated Steel and Locking Pins
F	**UFGR240005**	KStrong® Guardrail Outrigger Post for 4-way Baseplate (Required at each end of an installed system)

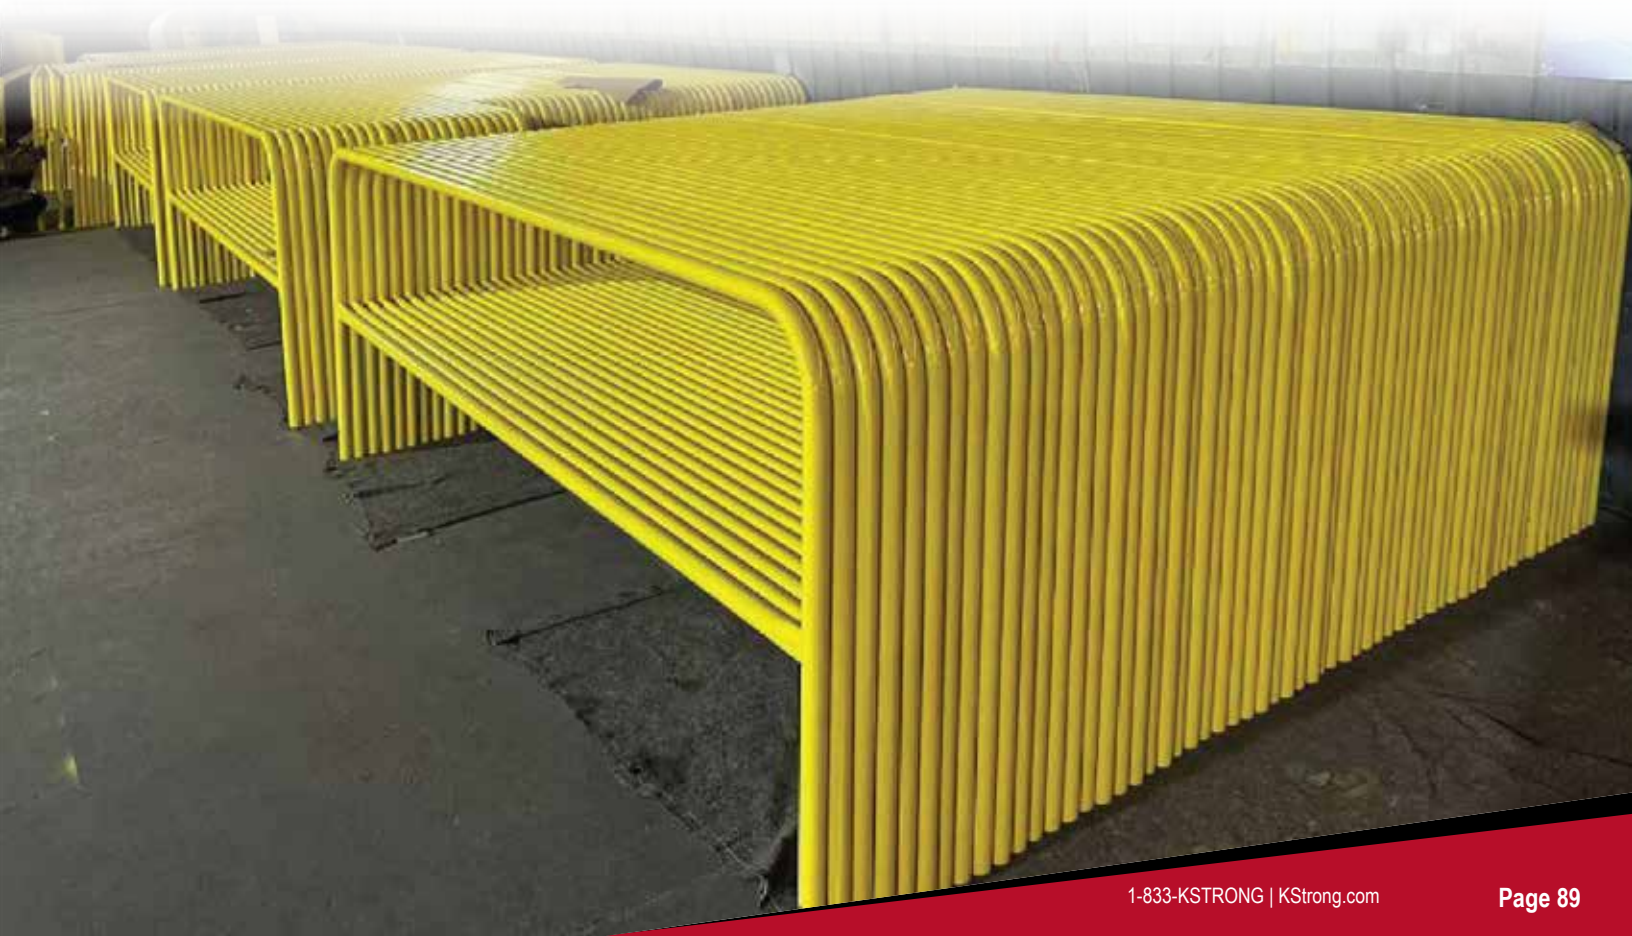

DROP PREVENTION

KStrong Kaptor™ tool lanyards are designed to reduce the risk of a dropped tool injuring anyone positioned below a worker. The worker's use of a tool securely attached to a Kaptor™ tool lanyard should significantly reduce the chance of an injury from occurring to workers or others below. Tool lanyards are designed to be attached securely at one end to a worker or to a suitable structure, with the other end attached to common hand tools. KStrong offers a variety of tool lanyards and attachments whose application is determined by the weight of the tool and how the lanyard is attached to a worker or to a structure. Please watch our growing video library for more information.

Kaptor™ Drop Prevention

DL100021 | Locking Single Carabiner - 22 lbs. ANSI Rated



DL100022 | Dual Leg Locking Single Carabiner - 22 lbs. ANSI Rated



KAPTOR™
DROP PREVENTION



DA300411 | Wrist Tool Lanyard - 2 lbs.



DA300401 | Pull-On Wrist Lanyard with Buckle - 3 lbs.



DA300201 | Small Tool/Radio Holster



DA300301 | Tape Measure Trap



DA300101 | Elastic Hard Hat Lanyard w/ Clamp - 2 lbs.



DT700101 | Self-Adhering Tape Trap - 12 ft. Roll



Kaptor™ Kits

DK400101 | Tool Tethering Kit - 5 lbs. Consists of DL100201 in standard pack of 3, DL100401 in standard pack of 1, DT700101 in standard pack of 1



DK400201 | Tape Measure Coil Tethering Kit - 2 lbs. Consists of DL100501 & DA300301 in standard pack



DK400301 | Tape Measure Lanyard Tethering Kit - 2 lbs. Consists of DL100401 & DA300301 in standard pack



Tool Tethering Kits (DT700101 and DL100501 plus corresponding Web Tool Tail)

DK400151(S) | Web Tool Tail, 3 lbs. S - 2.5 inches



DK400152(M) | Web Tool Tail, 3 lbs. M - 4.5 inches



DK400153(L) | Web Tool Tail, 3 lbs. L - 5.5 inches



DK400154(XL) | Web Tool Tail, 3 lbs. XL - 6.5 inches



DK400155(2XL) | Web Tool Tail, 3 lbs. 2XL - 8.5 inches



Kaptor™ Tool Lanyards

UDL100012 | Dual Leg - 10 lbs.



DL100021 | Locking Single Carabiner - 22 lbs. ANSI Rated



DL100022 | Dual Leg Locking Single Carabiner - 22 lbs. ANSI Rated



DL100011S | Screwgate Single Carabiner - 15 lbs. ANSI Rated



DL100041 | Tool Lanyard Single Carabiner with Web Loop - 22 lbs.



DL100042 | Dual Leg Tool Lanyard Single Carabiner with Web Loops - 22 lbs.



DL100701 | Hook to Loop Bungee Tool Tether - 35 lbs.



DL100711 | Hook 2 Loop Tool Tether, Heavy Duty - 80 lbs.



DL100501 | Coiled Cable Lanyard - 2 lbs.



DL100601 | Clip2Loop Coil Tether, 10 Pack



DL100801 | Wire Loop Tool Tail - 2 lbs. (6-Pack)



DL100802 | Wire Screw Gate Tool Tail - 3 lbs. (6-Pack)



DL100401 | Detachable Elasticated Single Screwgate Carabiner - 5 lbs.



DL100400 | Detachable Elasticated Single Screwgate Carabiner (without Loop) - 5 lbs.



DL100201 | Accessory Kit - Detachable Loops 3-pack



DL100611 | D-ring with Cord Loop, Attachment Points 10-pack



Kaptor™ Tool Lanyards

DL100101 | Elastic Loop Tool Tails Ext - 15 lbs. 3-pack



DL100151 | Elastic Loop Tool Tails Swivel - 10 lbs. 3-pack



DL100301 | Web Tool Tails, 3 lbs. 6-Pack S - 2.5 inches



DL100302 | Web Tool Tails, 3 lbs. 6-Pack M - 4.5 inches



DL100303 | Web Tool Tails, 3 lbs. 6-Pack L - 5.5 inches



DL100304 | Web Tool Tails, 3 lbs. 6-Pack XL - 6.5 inches



DL100305 | Web Tool Tails, 3 lbs. 6-Pack 2XL - 8.5 inches



DL100351 | Web Tool Tails with Swivel, 3 lbs. 6-pack S - 2.5 inches



DL100352 | Web Tool Tails with Swivel, 3 lbs. 6-pack M - 4.5 inches



DL100353 | Web Tool Tails with Swivel, 3 lbs. 6-pack L - 5.5 inches



DL100354 | Web Tool Tails with Swivel, 3 lbs. 6-pack XL - 6.5 inches



DL100355 | Web Tool Tails with Swivel, 3 lbs. 6-pack 2XL - 8.5 inches



DL200301 | Tool Cinch, Medium Duty, 35 lbs.



DL200311 | Tool Cinch, Single Wing, Medium Duty, 35 lbs.



DL200101 | Tool Cinch, Dual Wing, Medium Duty, 35 lbs.



DL200201 | Tool Cinch, Dual Wing, Medium Duty, 80 lbs.



BAGS









	Model	Description
A	UFZ200101	Kit Bag - Small
B	UFBBGF187	All Purpose Durable Equipment Bag (12.5"x16"x24")
C	UFBBGKS07	Dry Backpack with Webbing Side and Rope Pocket and an In-Structure Pockets (27"x10"x10"), Red Bottom with Black Top
D	UFZ810010	KStrong® 7 ft. Megapod™ Storage Bag
E	UFZ810020	KStrong® 10 ft. Megapod™ Storage Bag

QUICK INDEX

Part Number	Page No
AFX209070	70
AFZ177150	70
AFZ177151	70
AFZ830025	18
AFZ830050	18
AFZ830100	18
DA300101	90
DA300201	90
DA300301	90
DA300401	90
DA300411	90
DK400101	91
DK400151	91
DK400201	91
DK400301	91
DL100011S	92
DL100021	90
DL100022	90
DL100041	92
DL100042	92
DL100101	93
DL100151	93
DL100201	92
DL100301	93
DL100302	93
DL100303	93
DL100304	93
DL100305	93
DL100351	93
DL100352	93
DL100353	93
DL100354	93
DL100355	93
DL100400	92
DL100401	92
DL100501	92
DL100601	92
DL100611	92
DL100701	92
DL100711	92
DL100801	92
DL100802	92
DL200101	93
DL200201	93
DL200301	93
DL200311	93
DT700101	90
MPOD-ASS-005	66
MPOD-ASS-008	66
TRIP-ASS-031	66
UDL100012	92
UFA20003	56
UFA20004	56
UFA20006	56
UFA20010	56
UFA20016	56
UFA20024	56
UFA20030	56
UFA20504	54
UFA20506	54
UFA20602	56
UFA20602(FR)	56
UFA20603	56
UFA20603(FR)	56
UFA20604	56
UFA20604(FR)	56
UFA21004	54
UFA21006	54
UFA30001	58
UFA30005	59
UFA30010	58
UFA30015	58
UFA30015N	58
UFA30020	58
UFA30021	58
UFA30030	59
UFA30031	59
UFA30050	54
UFA30061	59
UFA30061(01) SUB1	59
UFA30061(02) SUB2	59

Part Number	Page No
UFA30061SUB3	59
UFA30070	59
UFA30080	54
UFA30090	54
UFA30110	55
UFA30111	55
UFA30115	55
UFA30130	55
UFA30201	59
UFA30201S	59
UFA30211	59
UFA30301	54
UFA30311	54
UFA30311(W)	54
UFA30401	60
UFA30420	62
UFA30430	63
UFA30430(SW)	63
UFA30501	56
UFA30501(04)	56
UFA40010	60
UFA40012	60
UFA40110	60
UFA55207(18)BP	59
UFA55207E(12)	59
UFA55207E(18)	59
UFA55207SW(12)	59
UFA55207SW(18)	59
UFA55370	59
UFA710003	56
UFA710004	56
UFA710006	56
UFA710103	56
UFA710104	56
UFA710106	56
UFB101025	57
UFB101050	57
UFB102025	57
UFB103050	57
UFB201050	57
UFB501125	57
UFBBGF187	94
UFBBGKS07	94
UFC401100	71
UFC401101	71
UFC401103	71
UFC401110	71
UFC401400	71
UFC404150	71
UFC404450	71
UFC404500	71
UFC405100	71
UFC408100	71
UFC408120	71
UFC408450	71
UFC408451	70
UFC409151	5
UFCHLLORING	60
UFF511000	72
UFF511500	72
UFF512000	72
UFF513100	72
UFF514000	72
UFF516000	72
UFG601010	58
UFG602050	72
UFG602100	58
UFG611010	58
UFG611020	58
UFGR140006	88
UFGR140008	88
UFGR140010	88
UFGR240002	88
UFGR240004	88
UFGR240005	88
UFH10101G	37
UFH10101P	37
UFH10102G	38
UFH10102P	38
UFH10131G	38
UFH10131P	38
UFH10201G	34
UFH10201GQ	33

Part Number	Page No
UFH10201P	34
UFH10211G	35
UFH10211P	35
UFH10231G	34
UFH10231P	34
UFH10241G	33
UFH10251G	35
UFH10251P	35
UFH10252P	36
UFH10261G	36
UFH10332G	26
UFH10332P	26
UFH10341G	26
UFH10501G	22
UFH10501Q	22
UFH10511G	22
UFH10511Q	22
UFH10531G	23
UFH10531Q	23
UFH10533G	23
UFH10533Q	23
UFH10541G	24
UFH10541Q	24
UFH10551G	24
UFH10551Q	24
UFH10700P	27
UFH10701P	27
UFH10710P	28
UFH10711P	28
UFH10731P	28
UFH10732P	28
UFH10801GQ	26
UFH10802Q	27
UFH10811GQ	27
UFH11502G	25
UFH11502Q	25
UFH11512G	25
UFH11512Q	25
UFH152011GQ	32
UFH15201GQ	32
UFH15201Q	32
UFH15203GQ	32
UFH15231GQ	33
UFH15231Q	33
UFH16001GP	37
UFH16101G	37
UFH16201GP	36
UFH16201GP(BL)	36
UFH16231GP	37
UFH16231GP(BL)	37
UFH19902GQFR	29
UFH19902PFR	29
UFH19902QFR	29
UFH19903PQFR	29
UFH90131G	30
UFH90141G	30
UFH90341G	30
UFH90471G	30
UFK10010	52
UFK10015	52
UFK10025	52
UFK20010	52
UFK20015	52
UFK20025	52
UFK20410	52
UFK20510	52
UFK23110	52
UFL201101	47
UFL201101(03)	47
UFL201101(04)	47
UFL201111	47
UFL201121	47
UFL201121(04)	47
UFL201131	47
UFL201301	48
UFL201331	48
UFL201402	48
UFL201421	47
UFL201422	48
UFL201601	49
UFL201611	49
UFL201621	49
UFL201622	49

Part Number	Page No
UFL201701	50
UFL201721	50
UFL201740	50
UFL201750	50
UFL204101	45
UFL204111	45
UFL204121	45
UFL204131	45
UFL205201	51
UFL205201(02)	51
UFL205201(03)	51
UFL205211	51
UFL205215	51
UFL205251	51
UFL205401	51
UFL206101	46
UFL206111	46
UFL206121	46
UFL206131	46
UFL206214	46
UFL206234	46
UFR100025	58
UFR100050	58
UFR100100	58
UFR100200	58
UFR100500	58
UFR200025	58
UFR200050	58
UFR200100	58
UFR200200	58
UFR200500	58
UFR210025	58
UFR210050	58
UFR210100	58
UFR210200	58
UFS310010	8
UFS310018L	12
UFS310020	8
UFS310020(SS)	8
UFS310025L	12
UFS310030	8
UFS310030(SS)	8
UFS310030L	12
UFS310050	8
UFS310050(SS)	8
UFS310050L	12
UFS310060R	66
UFS310080L	12
UFS310090	8
UFS310090R	66
UFS310130	9
UFS310150	9
UFS310206L	14
UFS310206LDV2	15
UFS314006L	14
UFS314006LDV2	15
UFS316106L	14
UFS316106LDV2	15
UFS319006L	14
UFS319006LDV2	14
UFS330008(SS)	8
UFS350002	4
UFS350002D	5
UFS350011	10
UFS350025	10
UFS350206L	16
UFS350206LDV2	17
UFS351102	4
UFS351102D	5
UFS354002	4
UFS354002D	5
UFS354006L	16
UFS354006LDV2	17
UFS354011	10
UFS356002	4
UFS356002D	5
UFS356106L	16
UFS356106LDV2	17
UFS359002	4
UFS359002D	5
UFS359206	11
UFS359206D	11
UFS359506	11

Part Number	Page No
UFS359506AR	11
UFS359506S	11
UFS389006D	11
UFS389006DA	11
UFS390006	6
UFS390006D	7
UFS394006	6
UFS394006D	7
UFS396006	6
UFS396006D	7
UFS480020	9
UFS480020L	13
UFS480025L	13
UFS480030	9
UFS480050	9
UFS480050L	13
UFS570025	18
UFS570050	18
UFS570080	18
UFT510007	66
UFT510007BK	64
UFT510007DK	64
UFT510007RK	64
UFT510010	66
UFT510010B	66
UFT510010B2	66
UFT510010BK	65
UFT510010DK	65
UFT510010RK	65
UFT530060	66
UFT530060SS	66
UFT531130	66
UFT551011BK	68
UFT551011DK	68
UFT551021BK	68
UFT551021DK	68
UFT551031BK	68
UFT551031DK	68
UFT551080	67
UFT551080DK	67
UFT555001	69
UFT555002	69
UFT555101	69
UFT555201	69
UFT556001	69
UFT556101	69
UFT556201	69
UFT557101	69
UFX207001	70
UFX209070(150)	70
UFX209070(300)	70
UFX903010	66
UFX903050	58
UFX903051	70
UFXR4001	60
UFZ200101	40
UFZ800100	40
UFZ800200	40
UFZ800201	40
UFZ800501	40
UFZ801001	40
UFZ801011	40
UFZ801012	40
UFZ801013	21
UFZ801014	21
UFZ802001	40
UFZ809030	73
UFZ810010	66
UFZ810020	66
UFZ820100	66
UFZ840010	31
UFZ840020	31
UFZ840030	18
UFZ840100	18
UFZ850100	39
UFZ910001	31
UFZ910005	31
UFZ920011	31
USCLC0100	72
USCLC0130	72
USCLC0160	72
USCLC020	72
USCLC0200	72

Part Number	Page No
USCLC030	72
USCLC040	72
USCLC050	72
USCLC060	72
USCLC070	72
USCLC080	72
USCLC090	72



KSTRONG® COMPASS™

THIS. IS. A. GAME CHANGER!

Your KStrong® fall protection gear just got an upgrade like no other.

KStrong Compass™ is a cloud-based software app which relieves the user from a mountain of paper records. The unique AIR system (Automated Inspection Reminder system) reminds a user of a pending competent person inspection that is required to minimize accidents that may happen due to equipment that has not been properly inspected.

Watch Demo Inspection Video
Scan with Camera

Download on the App Store

GET IT ON Google Play

Compass™ Features

Introducing KStrong Compass™, the fall protection industry's first "free at your fingertips" mobile application for fall protection equipment asset management.

Pre-Use Inspection Instructions

The mobile app provides each user vital information on inspection and periodic maintenance needs and helps in increasing the life of the equipment.

Get Tech Data & Manuals

User Instruction Manuals, Technical Data Sheets, Declarations of Conformity, Product Images, Videos, PowerPoint presentations and more are available.

Track Usage

The KStrong Compass™ user management system allows equipment to be issued to individuals, thus ensuring accountability towards the upkeep of the equipment.

KSTRONG® UNRIVALED SAFETY.

KS GROUP

KStrong Inc.

Address:
18505 Intercontinental Crossing
Houston, TX 77073
Email: contact@kstrong.com

Hours of Operation:
8am - 4pm EST
Phone/Fax:
1-833-KSTRONG
Website:
www.KStrong.com

Last Revision Date: June 13, 2025

Proud Members of:

AMERICAN SOCIETY OF SAFETY PROFESSIONALS

STAFDA MEMBER

DISTRIBUTOR PARTNERS OF AMERICA DPA BUYING GROUP Partners in Business